



GLAZE VITRIFIED TILES

1200X1200MM





The Brand Story

Ncraze ceramic is poised to go on a remarkable and never ending journey of excellence in the Tiles Industry. To add energy and vigor to this journey, it is equipped with state of the art infrastructure comprising best of machinery, resources and manpower. At a huge plant established at the most advantageous Location of Gujarat. Ncraze ceramic brings you the convenience of comprehensive tiling solutions under one roof. With its meticulously crafted innovative tiling solutions, Ncraze ceramic is garnering accolades and trust of clients across the world.

Ncraze ceramic – the brain child of industry veterans with rich experience and expertise of more than a decade in the tiles industry started as an endeavor to create a new benchmark of creativity, quality and perfection in the industry through niche products. Today, after half a decade of journey and most varied product range made through most advanced technologies exhibiting elegance, Ncraze ceramic has become one of the most trusted and favored brand for architects, interiors designers, builders and all.






STATUARIO SMOKE








OXY GREY

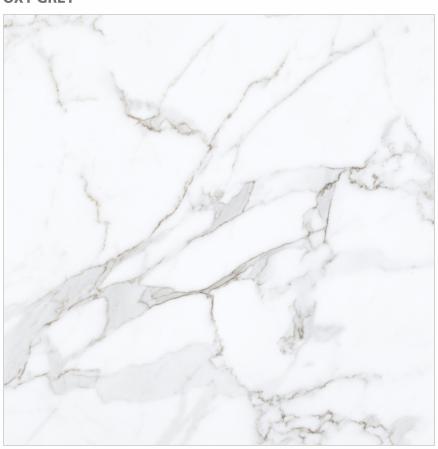

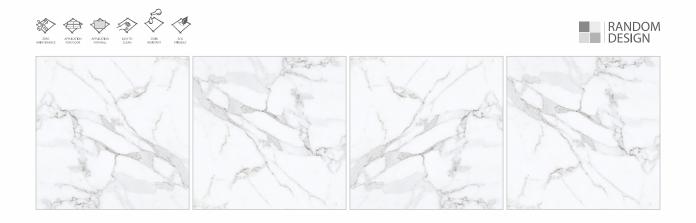



MARBITA WHITE







BIANCO CARRARA








SCOT ONYX








ONYX SKY

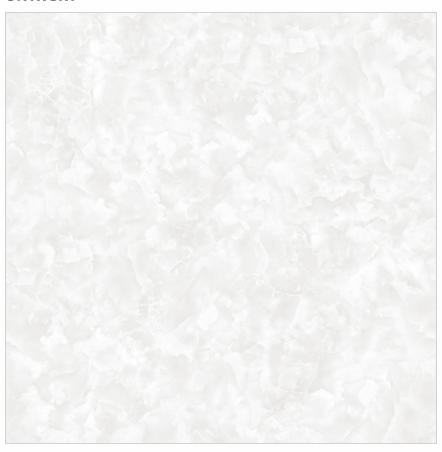

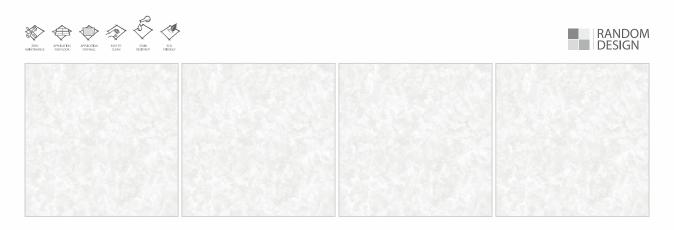







BRECCIA GOLD







BRECCIA SMOOTH








DELICATO BEIGE



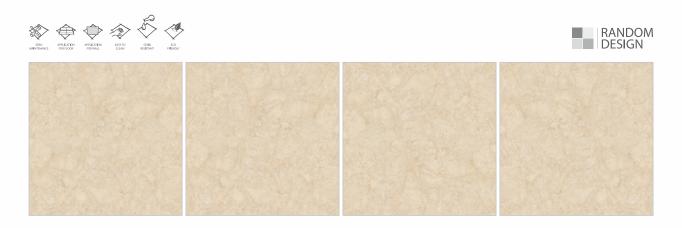



LOGAS MARFIL







STARK BEIGE







STARK CREMA







STARK COTTO











DYNA MARINO








BOSCO GREY









DYNA COLLIN














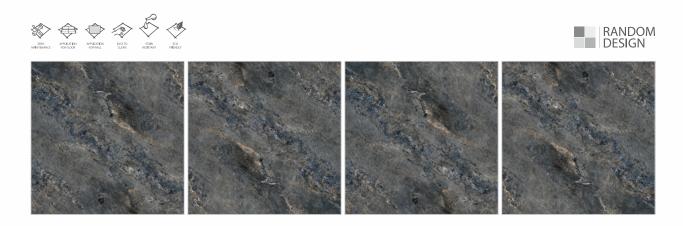



LAVA NATURAL

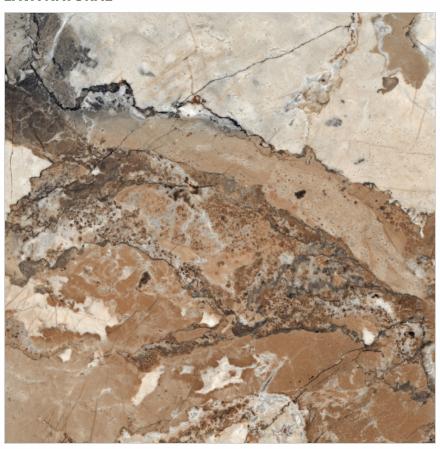

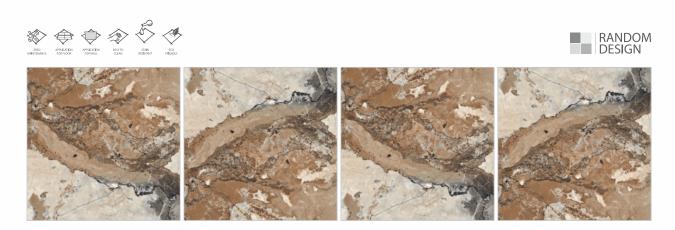



MAKARANI WHITE







ZENITH GREY







ZENITH BROWN












CORUS BROWN

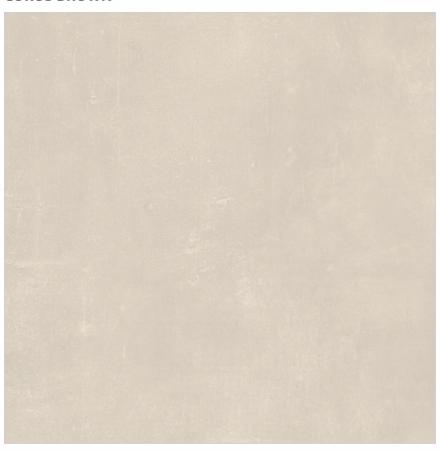






HAWANA BEIGE









LATINA CREMA

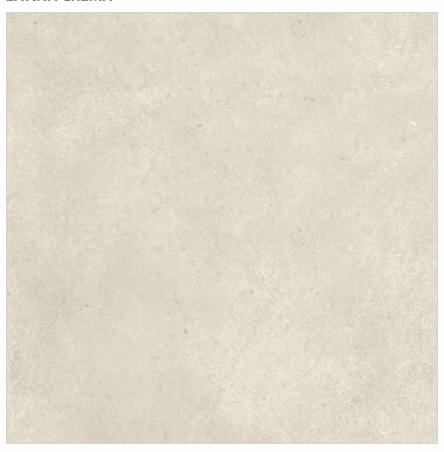

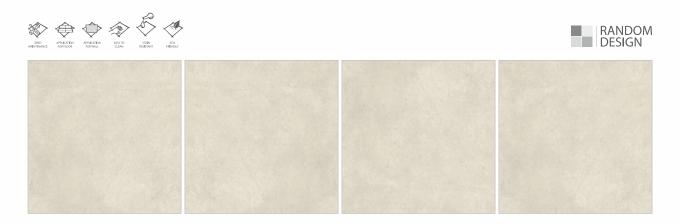



TRACKS IVORY

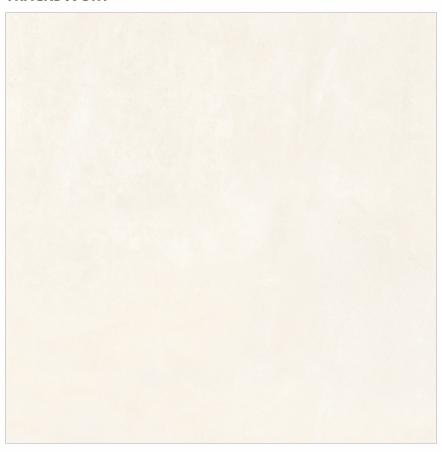





TRACKS BIANCO







TRACKS BROWN








RUSTIC

EGESTA BEIGE

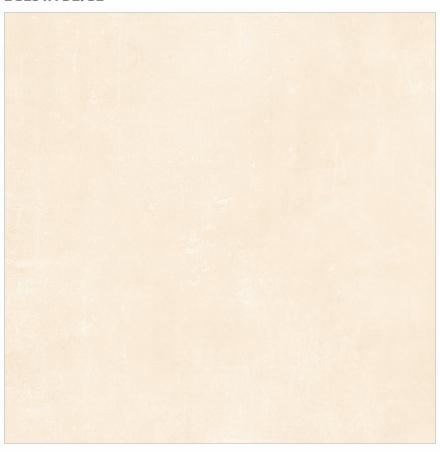






RUSTIC

EGESTA GREY

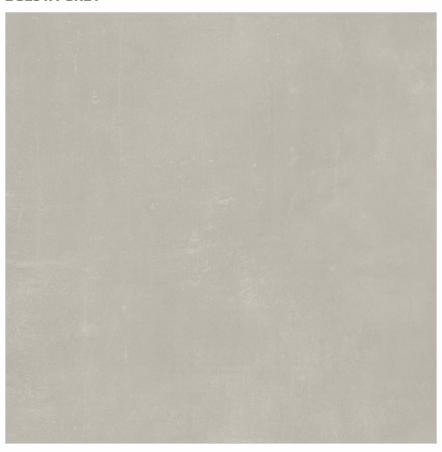






RUSTIC


ALDER CREMA

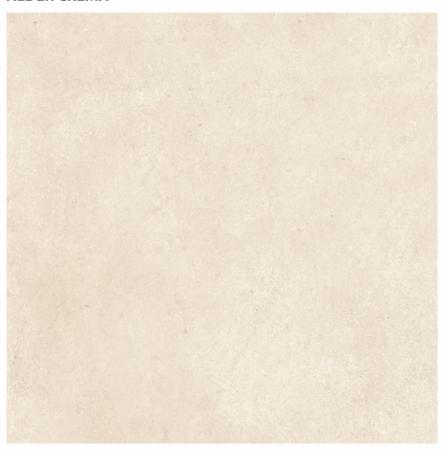







RAMOS GRIS

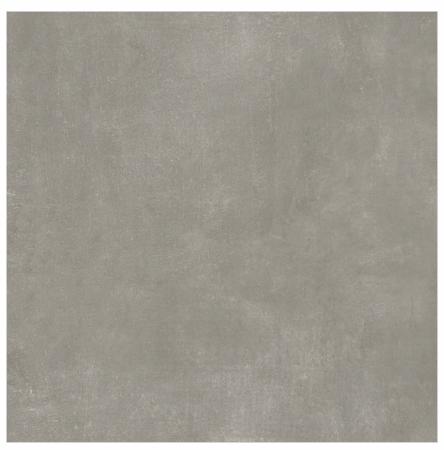

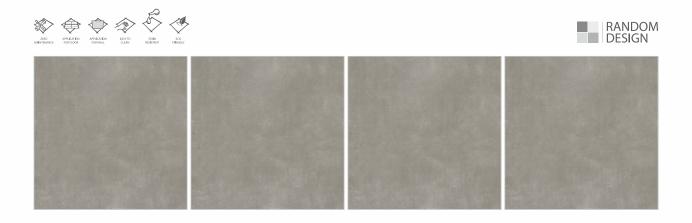



RAMOS MINT

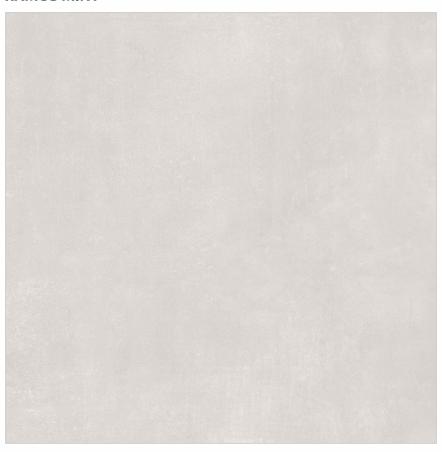





ALDER GRIS








FILETTO ORANGE







IRIS BROWN

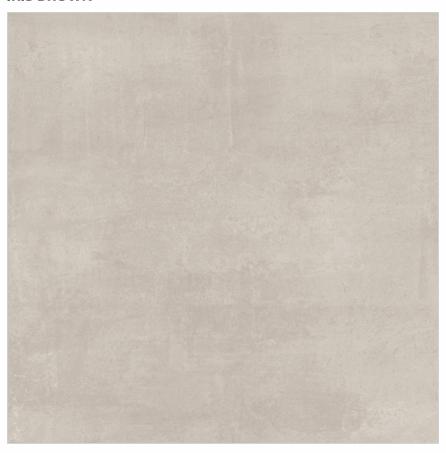





IRIS GREY








IRIS MOKA



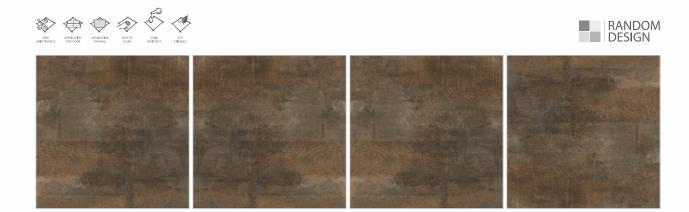







CHELSEA BEIGE















SEASTONE GREY











SEASTONE BEIGE







(A) D	DIMENSION & SURFACE QUALITY	Requirement as per ISO 13006:2012 Gr Bla Eb≤0.5%	Requirement as per IS 15622:2017 Gr Bla E≤0.08%	Value	Test Method
	Deviation In Length & Width	± 0.6%	± 0.1%	± 0.1%	ISO 10545 Pa IS 13630 Par
	Deviation In Thickness	± 5.0%	± 5.0%	± 3.0%	ISO 10545 Pa IS 13630 Par
()	Straightness of Edge	± 0.5%	± 0.1%	± 0.1%	ISO 10545 Pa IS 13630 Par
V	Rectangularity	± 0.5%	± 0.1%	± 0.1%	ISO 10545 Pa IS 13630 Par
→ €	Surface Flatness	± 0.5%	± 0.5%	± 0.2%	ISO 10545 Pa IS 13630 Par
% .	Water Absorption % By Wt.	≤ 0.5, Ind 0.6 Max.	≤ 0.08, Ind. 0.1 Max.	≤ 0.05%	ISO 10545 Pa IS 13630 Par
<u>↓</u> ↑↑	Flexural Strength (MOR) In N/mm ²	Avr.35, Ind. Min. 32	Avr.35, Ind. Min. 32	≥40 N/mm²	ISO 10545 Pa IS 13630 Par
ş.	Breaking Strength in N	1300 N Min.	1300 N Min.	> 2000 N	ISO 10545 Pa IS 13630 Par
Ì	Bulk Density (gm/cc)	2.0 Min.	2.2 Min.	≥ 2.2	ISO 10545 Pa IS 13630 Par
<u> </u>	Impact Resistance	> 0.40	> 0.55	> 0.55	ISO 10545 Pa IS 13630 Par
0	Resistance to Surface Abrasion	Manufacturer to State Class	PEI II Min	MPEI III (Glossy) PEI IV & IV+ (Matt)	ISO 10545 Pa IS 13630 Par
	Thermal Shock Resistance	10 cycle Min.	10 cycle Min.	No Damage after 10 cycles	ISO 10545 Pa IS 13630 Par
6 *	Moisture Expansion in mm/M	Test Method Available	0.02 Max.	Nil	ISO 10545 Pa IS 13630 Par
ş	Crazing Resistance	Required	4 Cycle at 7.5 bar Min.	Resistance	ISO 10545 Pa IS 13630 Par
*	Frost Resistance	Resistance	Resistance	Resistance	ISO 10545 Pa IS 13630 Par
*	Moh'S Scratch Hardness	Min. 5	Min. 5	Min. 5	EN 101 IS 13630 Par
S	Resistance To House hold Chemicals	No Damage	Min Class AA	Class AA	ISO 10545 Pa IS 13630 Part
Ĩ	Resistance To Acids & Alkalis (Except HF Acid)	No Damage	Min Class AA	Class AA	ISO 10545 Pa IS 13630 Part
IA.	Stain Resistance	Min Class 3	Min Class 1	Resistance	ISO 10545 Par IS 13630 Part

* Not Applicable for Glossy finishes

** These parameters are not applicable for structured numbes

PACKING SPECIFICATION

Size (mm)	Packing	Weight (Kg.)	Thickness	Area Sq. mtr / Box
1200x1200mm	2 Pcs.	60 Kg.	9mm	2.88 Sq. mtr.

DISCLAIMER: NCRAZE Tiles reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors. All complaints need to be reported within 10 days of purchase. Always follow instructions to avoid complaint due to bad masonry.



Thank You!