



01 1200x  
2400mm

02 800x  
2400mm  
Full body  
( 15mm )

03 900x  
1800mm

04 800x  
1600mm

05 1200x  
1200mm

EXPERIENCE  
**versatile**  
DESIGNS



ENRICHING

# Architecture



## FINISHES



Metallic  
finish



Rustic  
finish



Full polished  
finish



High glossy  
finish



Glossy  
finish



Matt  
finish



Full body  
(s&p)

# Opulent

LIVING WITH ARCHITECTURE

## FEATURES



High  
Durable



Acid  
Resistance



Stain  
Resistance



Easy to  
Clean



Maintenance  
Free



Dimensional  
Stability



Slip  
Resistance



Eco  
Friendly





GEOMETRIES OF THE SPACES WHERE TO LIVE,  
FULFILL YOUR AMBITIONS WITH US.

WE CREATE  
**Colossal**  
PRODUCT RANGE

**1200  
X  
2400  
MM**

M I G H T Y S I Z E

A floor made of large tiles makes any room up-to-date. The minimum width grout joints are used beautifully that makes your surface consistent with the rectified edges & sure gives utter elegance.



1200x  
2400mm

HIGH GLOSSY FINISH

9mm thickness



Versatile solutions



Easier to lay



Resistant to chemical




Resistant to loads




Resistant to stains



Wide range

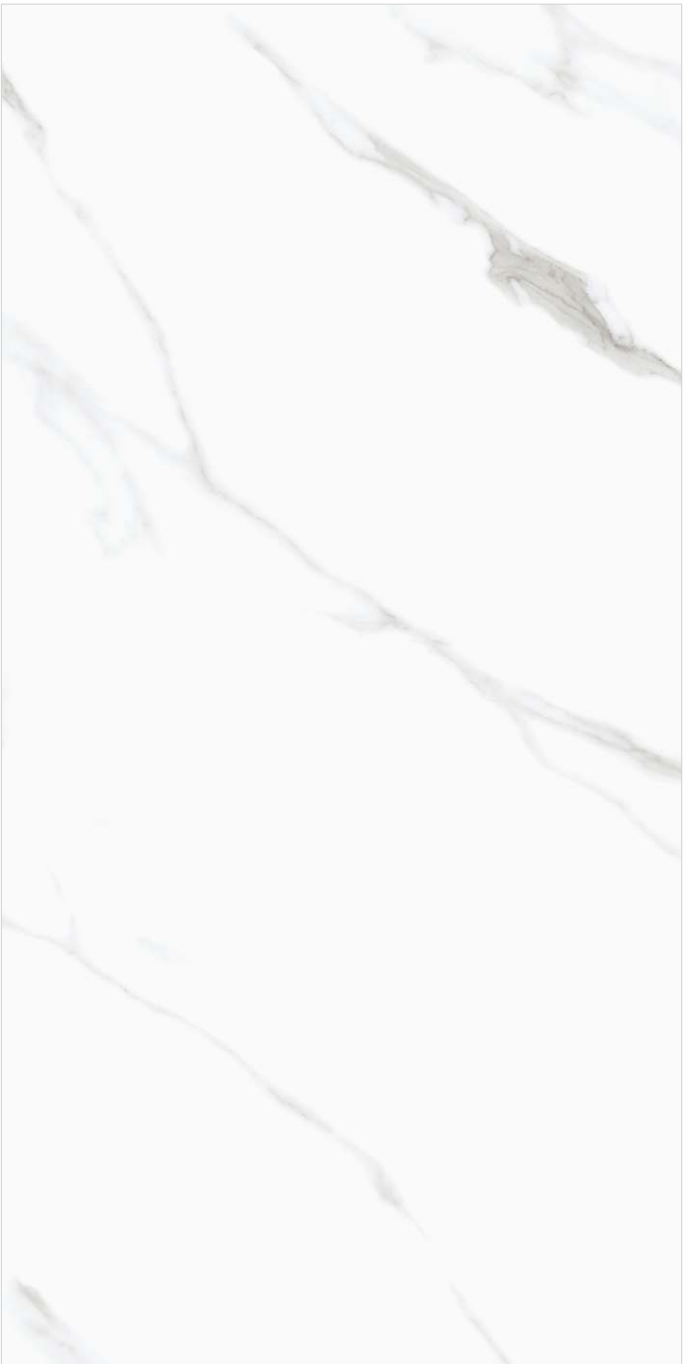

ARCTIC WHITE 2 RANDOM

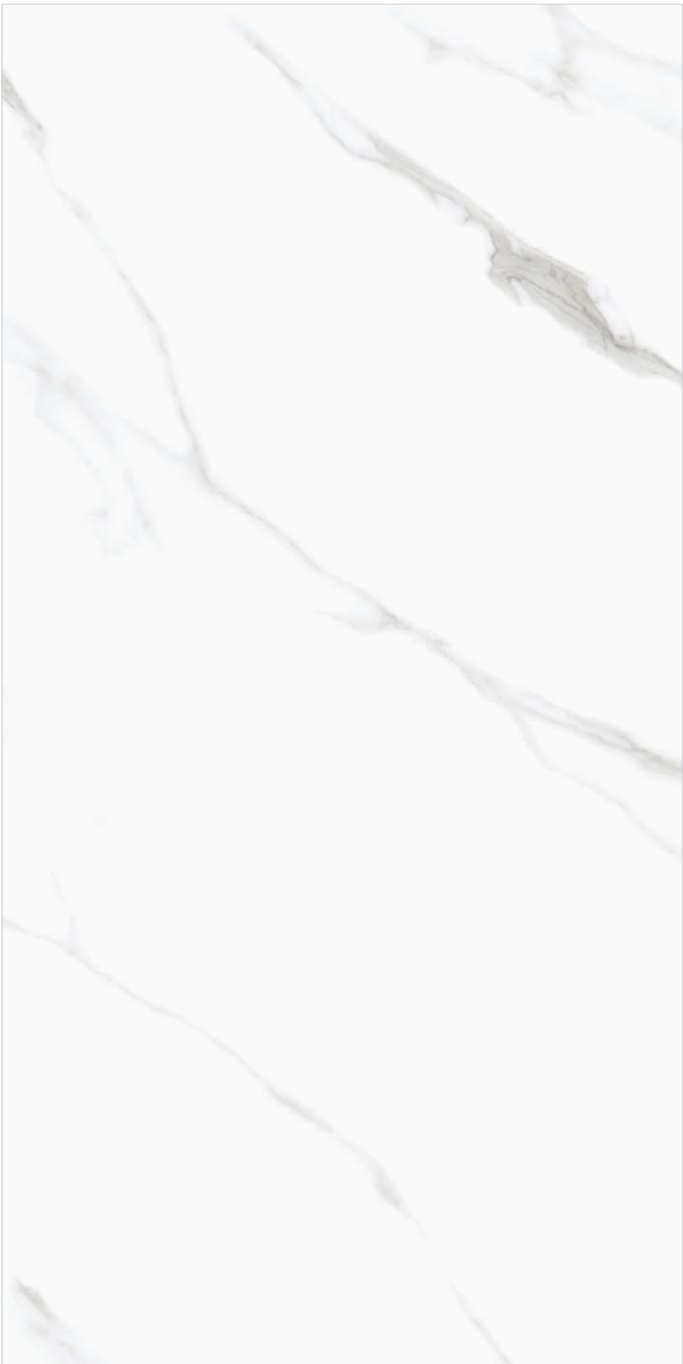

ARTIC WHITE (BOOK MATCH) BOOK MATCH A+B



CLRYS WHITE 3 RANDOM



IMPERIAL WHITE (CONTINUE) 3 FACE CONTINUE





1200x  
2400mm

HIGH GLOSSY FINISH

9mm thickness



Versatile  
solutions



Easier  
to lay



Resistant to  
chemical



Resistant  
to loads




Resistant  
to stains




Wide  
range




ALTIMO WHITE 2 RANDOM



ALTIMO WHITE (BOOK MATCH) BOOK MATCH A+B



DIAMOND WHITE 2 RANDOM



DIAMOND WHITE (CONTINUE) 4 FACE CONTINUE





1200x  
2400mm

HIGH GLOSSY FINISH

9mm thickness



Versatile solutions



Easier to lay



Resistant to chemical



Resistant to loads



Resistant to stains



Wide range



ATLANTIC WHITE 2 RANDOM



ATLANTIC WHITE (CONTINUE) 2 FACE CONTINUE



PEARL WHITE (CUNTINUE) 3 FACE CONTINUE



CRISTAL WHITE 3 RANDOM







WALL : ATLANTIC WHITE | FLOOR : ATLANTIC WHITE



1200x  
2400mm

HIGH GLOSSY FINISH

9mm thickness



Versatile  
solutions



Easier  
to lay



Resistant to  
chemical



Resistant  
to loads



Resistant  
to stains



Wide  
range




GLORIOUS WHITE (CONTINUE)

3 FACE CONTINUE



GLORIOUS WHITE (BOOK MATCH)

BOOK MATCH A+B



STATUARIO FANTASTICO

4 RANDOM



STATUARIO NATURAL

3 RANDOM






1200x  
2400mm

HIGH GLOSSY FINISH

9mm thickness



STATUARIO RIO 3 RANDOM

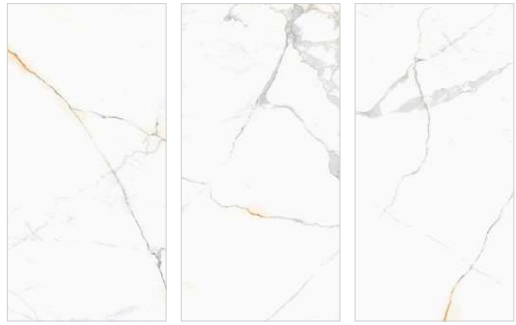

STATUARIO BELGIA (CONTINUE) 3 FACE CONTINUE

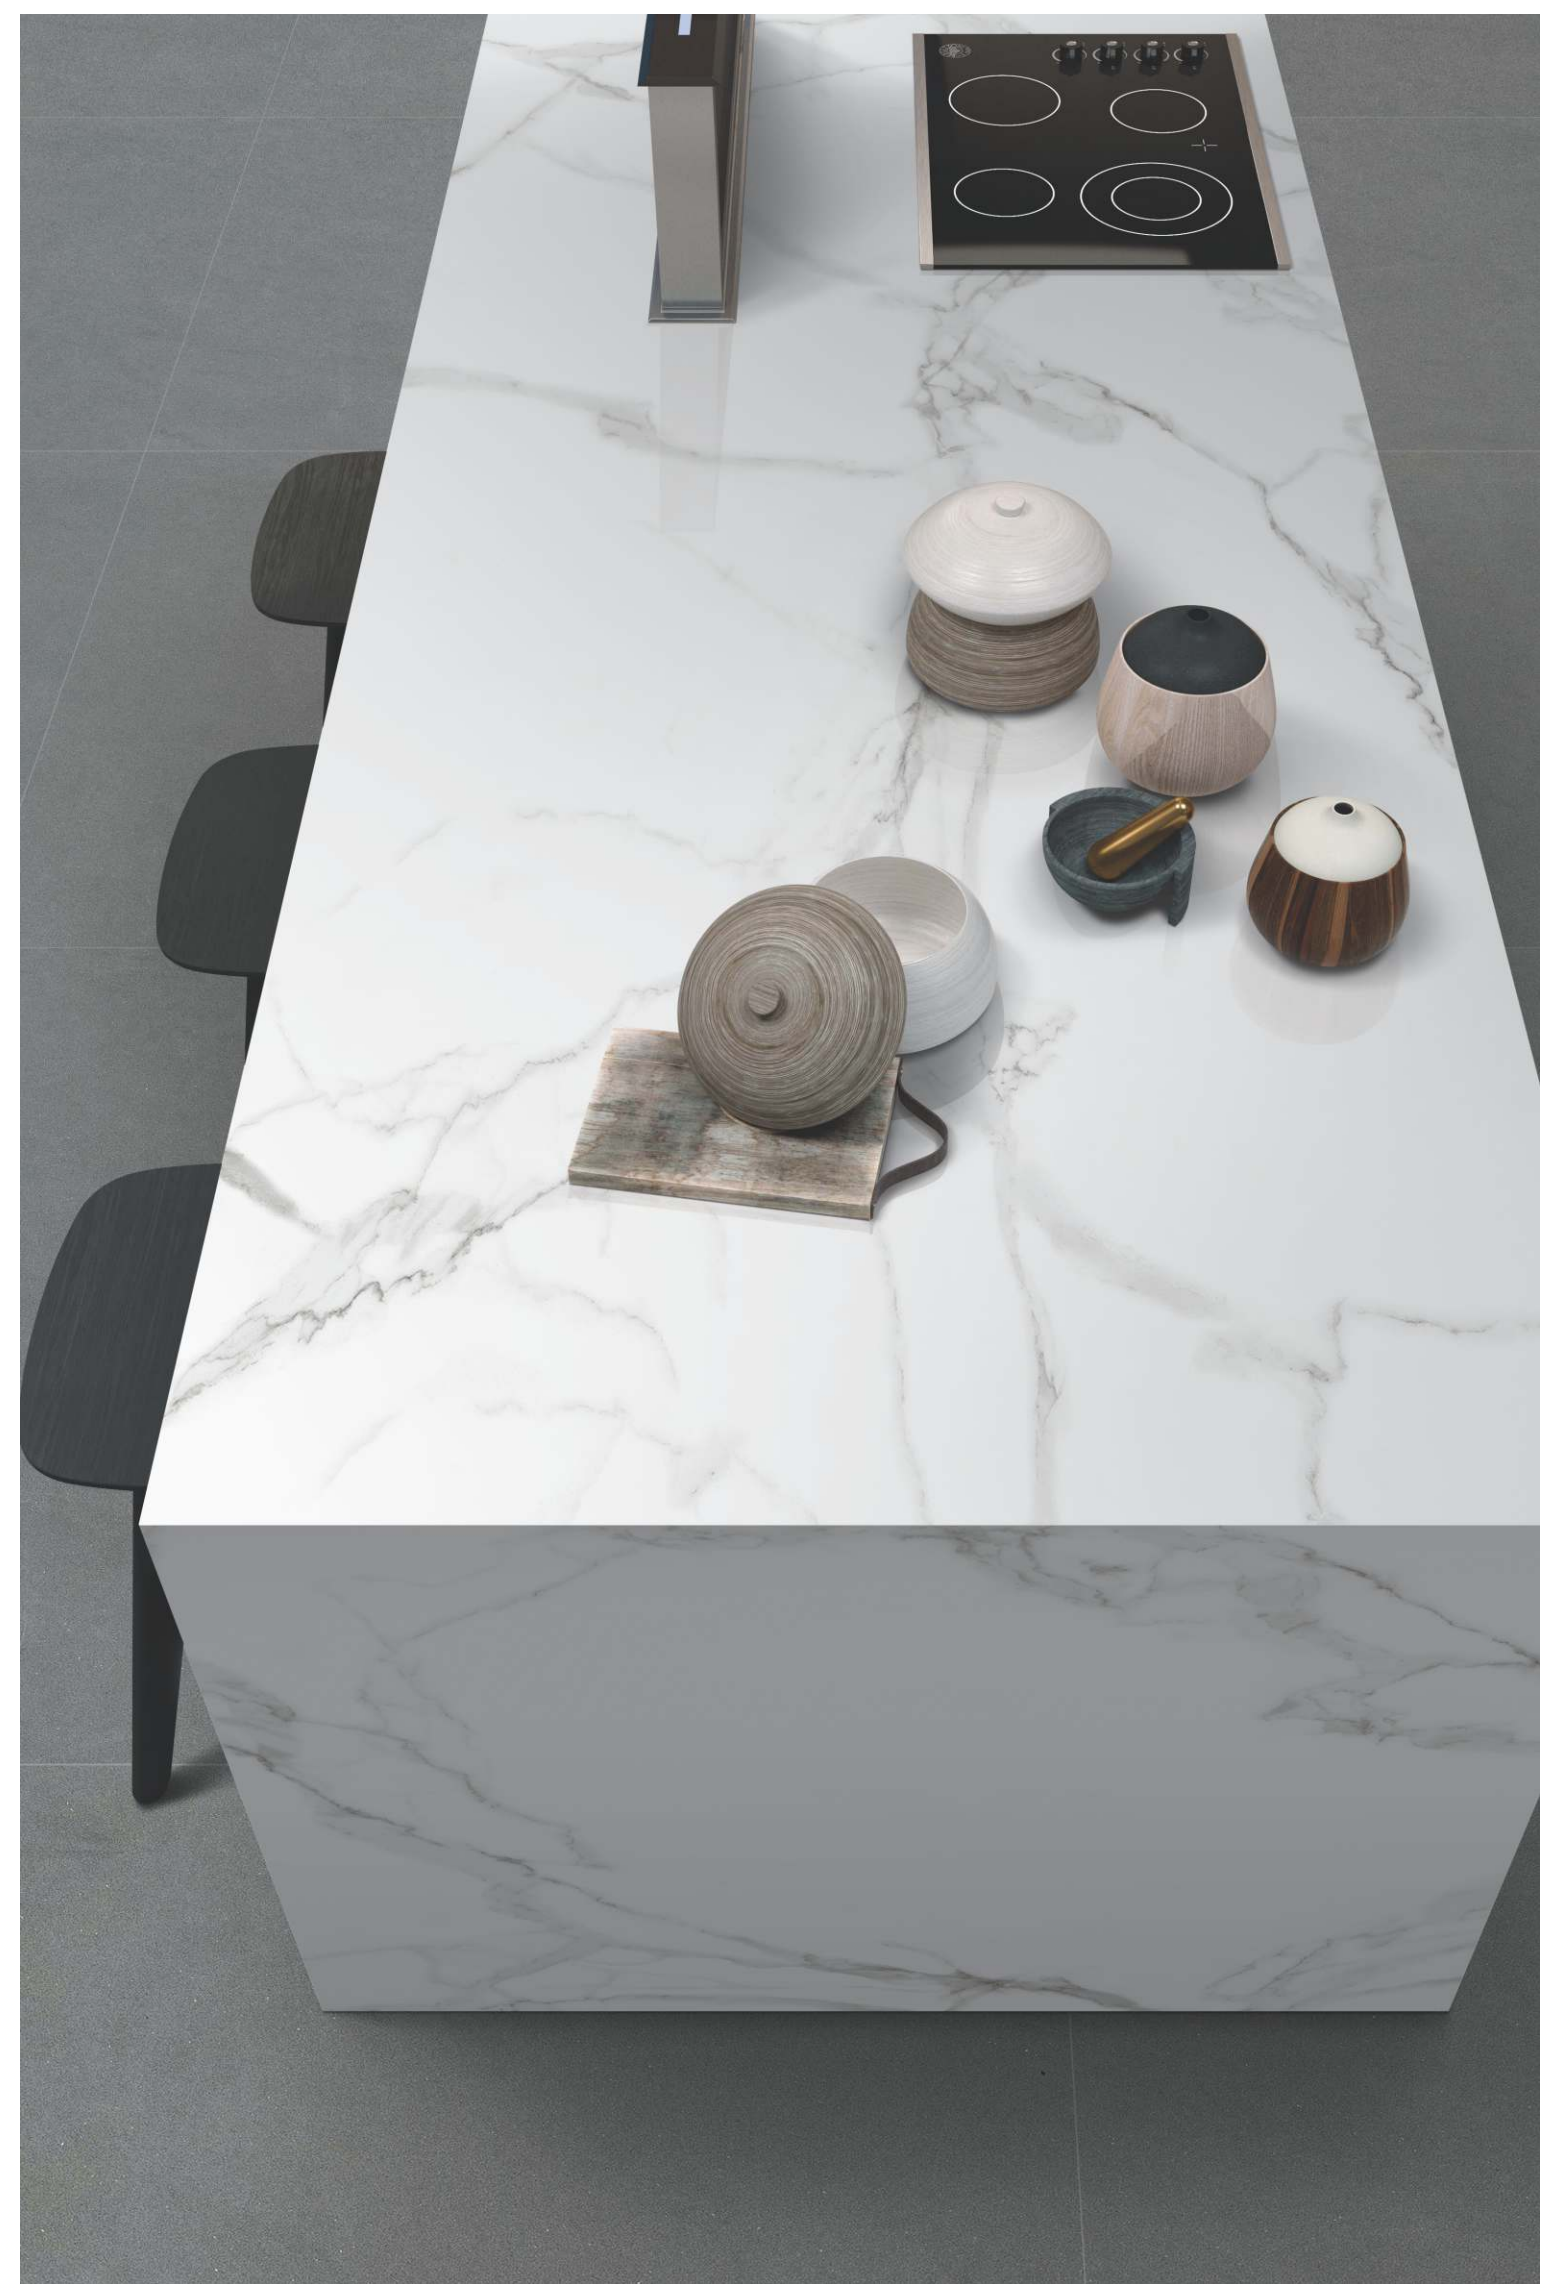


TABLE TOP : STATUARIO BELGIA | FLOOR : SENTILIA GRIS



1200x  
2400mm

HIGH GLOSSY FINISH

9mm thickness



Versatile solutions



Easier to lay



Resistant to chemical



Resistant to loads



Resistant to stains



Wide range



STATUARIO DOES

3 RANDOM




ANTIQUE SATVARIO

4 RANDOM



GALAXY STUTUARIO (BOOK MATCH)

BOOK MATCH A+B

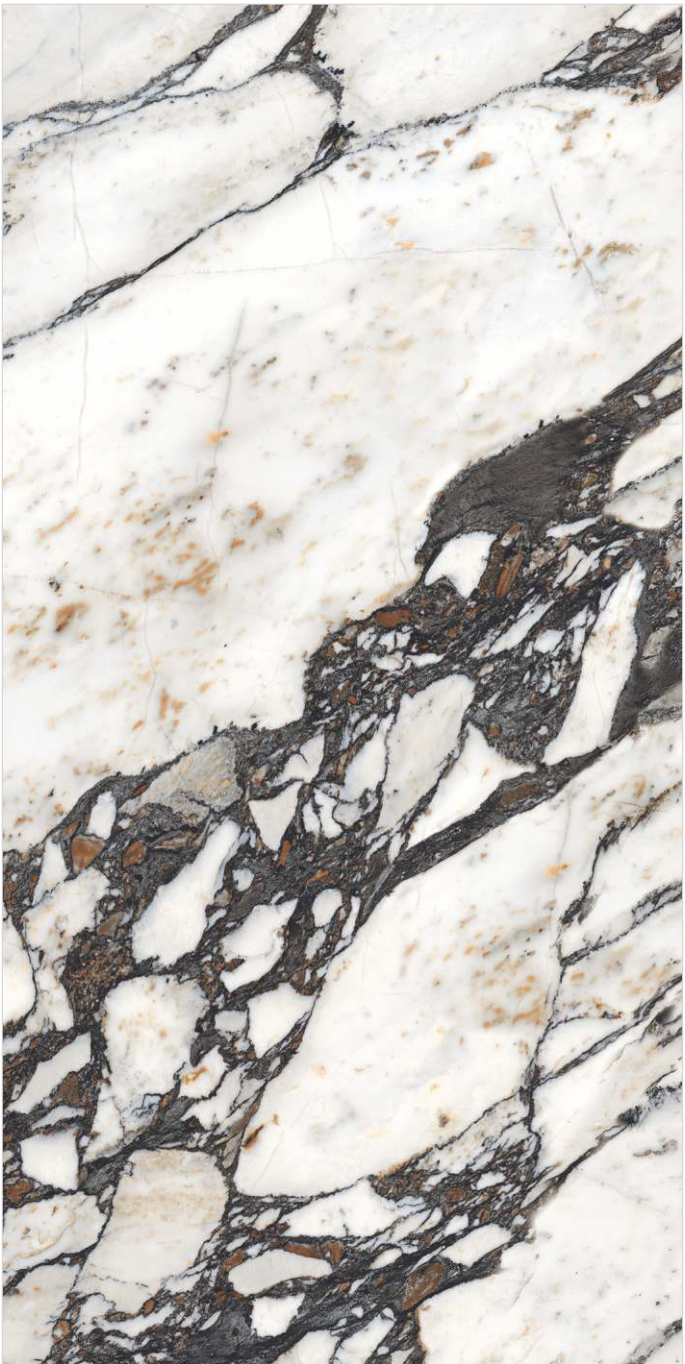

IMPACT SATVARIO (CONTINUE)

3 FACE CONTINUE





1200x  
2400mm

HIGH GLOSSY FINISH

9mm thickness



Versatile solutions



Easier to lay



Resistant to chemical



Resistant to loads



Resistant to stains



Wide range



ALEX CALACATTA 3 RANDOM



STATUARIO CALACATTA 3 RANDOM



CALACATTA LUCINA (CONTIUNE) 2 FACE CONTINUE



ONYX SKY 3 RANDOM









1200x  
2400mm

HIGH GLOSSY FINISH

DECOR SERIES

9mm thickness



Versatile  
solutions



Easier  
to lay



Resistant to  
chemical




Resistant  
to loads



Resistant  
to stains




Wide  
range

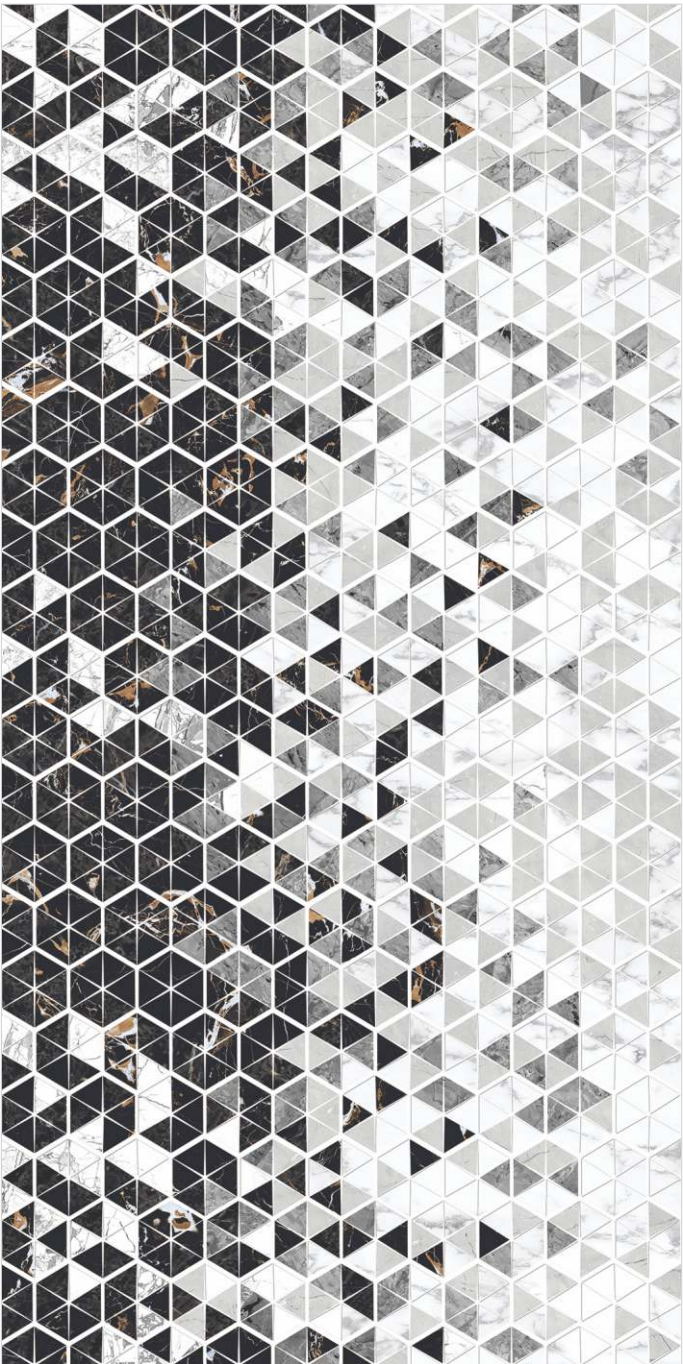

M 1001

1 RANDOM



M 1002

1 RANDOM



M 1003

1 RANDOM



M 1004

1 RANDOM





1200x  
2400mm

HIGH GLOSSY FINISH

9mm thickness

- Versatile solutions
- Easier to lay
- Resistant to chemical
- Resistant to loads
- Resistant to stains
- Wide range



ZED ONYX ICE

4 RANDOM



ZED ONYX CLASSIC

4 RANDOM



ONYX LUXURY

3 RANDOM



CRISTALLO ONYX

2 RANDOM





1200x  
2400mm

HIGH GLOSSY FINISH


9mm thickness



WILLIAM BIANCO 2 RANDOM



MONTANA GREY 2 RANDOM



Versatile  
solutions



Easier  
to lay



Resistant to  
chemical



Resistant  
to loads



Resistant  
to stains




Wide  
range



TURKE LANA 1 RANDOM



CRISTAN STONE 2 RANDOM



\*Dark High Glossy Series



1200x  
2400mm

HIGH GLOSSY FINISH

9mm thickness



SONATA WHITE 3 RANDOM



\*



SONATA BRONZE 3 RANDOM



\*Dark High Glossy Series



Versatile  
solutions



Easier  
to lay



Resistant to  
chemical



Resistant  
to loads



Resistant  
to stains



Wide  
range



TITANIUM BROWN 3 RANDOM



\*



TITANIUM NATURAL 3 RANDOM



\*Dark High Glossy Series



1200x  
2400mm

HIGH GLOSSY FINISH

9mm thickness




ARMANI BEIGE 2 RANDOM



\*



ARMANI GOLD 2 RANDOM



\*Dark High Glossy Series



Versatile solutions



Easier to lay



Resistant to chemical



Resistant to loads




Resistant to stains



Wide range



ARMANI GREY 2 RANDOM




\*Dark High Glossy Series

\*



ARMANI GRISS 2 RANDOM



\*





WALL : ARMANI BEIGE & ARMANI GOLD | FLOOR : ARMANI BEIGE



1200x  
2400mm

HIGH GLOSSY FINISH

9mm thickness



VENUS CREMA 3 RANDOM



DYNA SUPREME 2 RANDOM



FLOOR : DYNA SUPREME



1200x  
2400mm

HIGH GLOSSY FINISH


9mm thickness



BROCKEN BRECIA (BOOK MATCH) BOOK MATCH A+B



\*

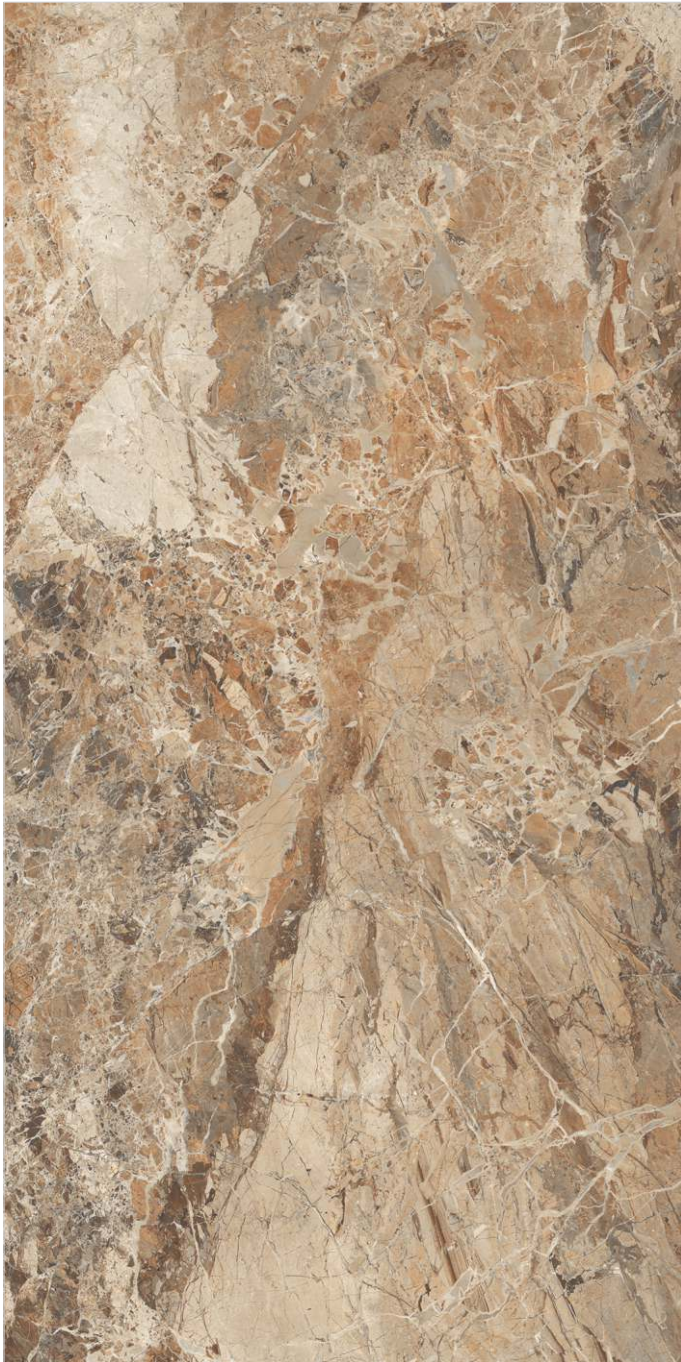

BRECCIA CLASSIC 2 RANDOM



Versatile solutions



Easier to lay



Resistant to chemical



Resistant to loads



Resistant to stains



Wide range



BRECCIA BEIGE 3 RANDOM



BRECCIA LAVA 2 RANDOM








FLOOR : BRECCIA BEIGE



1200x  
2400mm

HIGH GLOSSY FINISH

9mm thickness

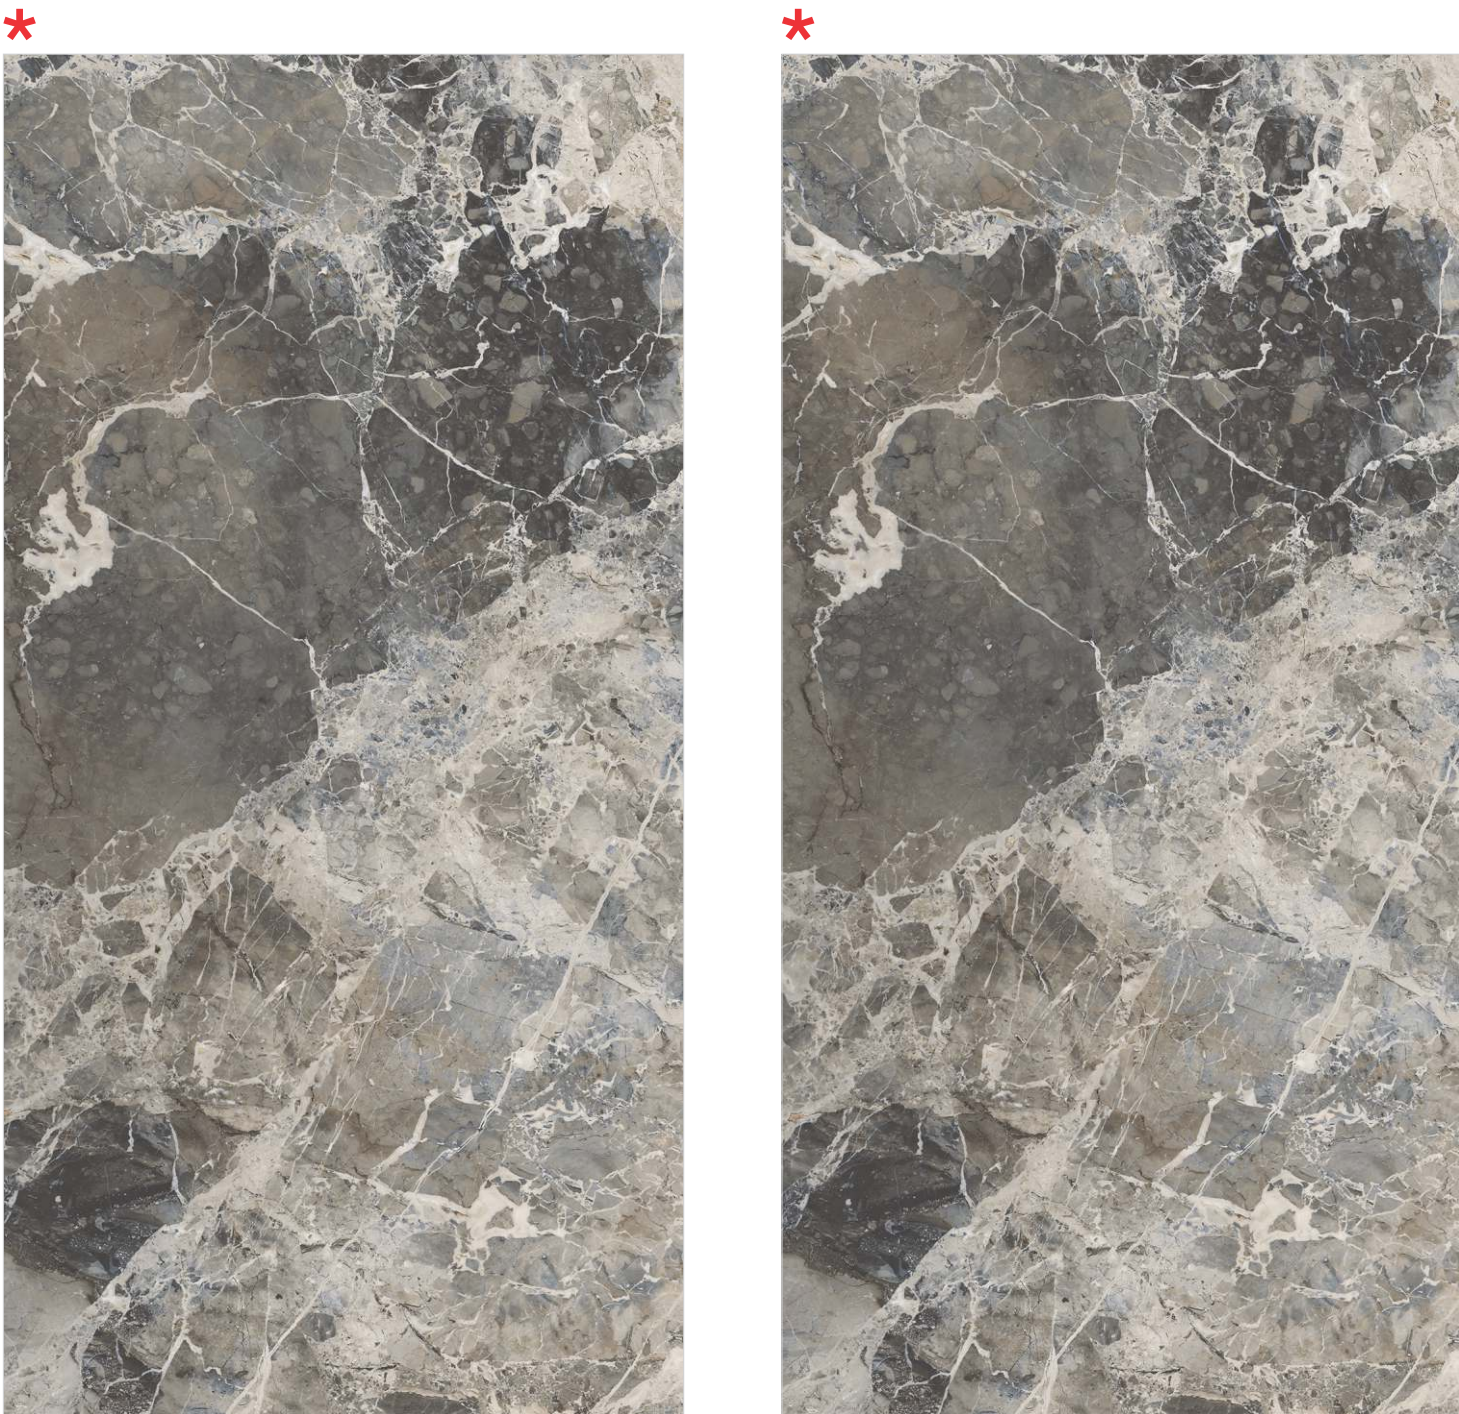

BRECCIA CAPRAIA 4 RANDOM




BRECCIA CAPRAIA (BOOK MATCH) BOOK MATCH A+B




\*Dark High Glossy Series

- Versatile solutions
- Easier to lay
- Resistant to chemical
- Resistant to loads
- Resistant to stains
- Wide range

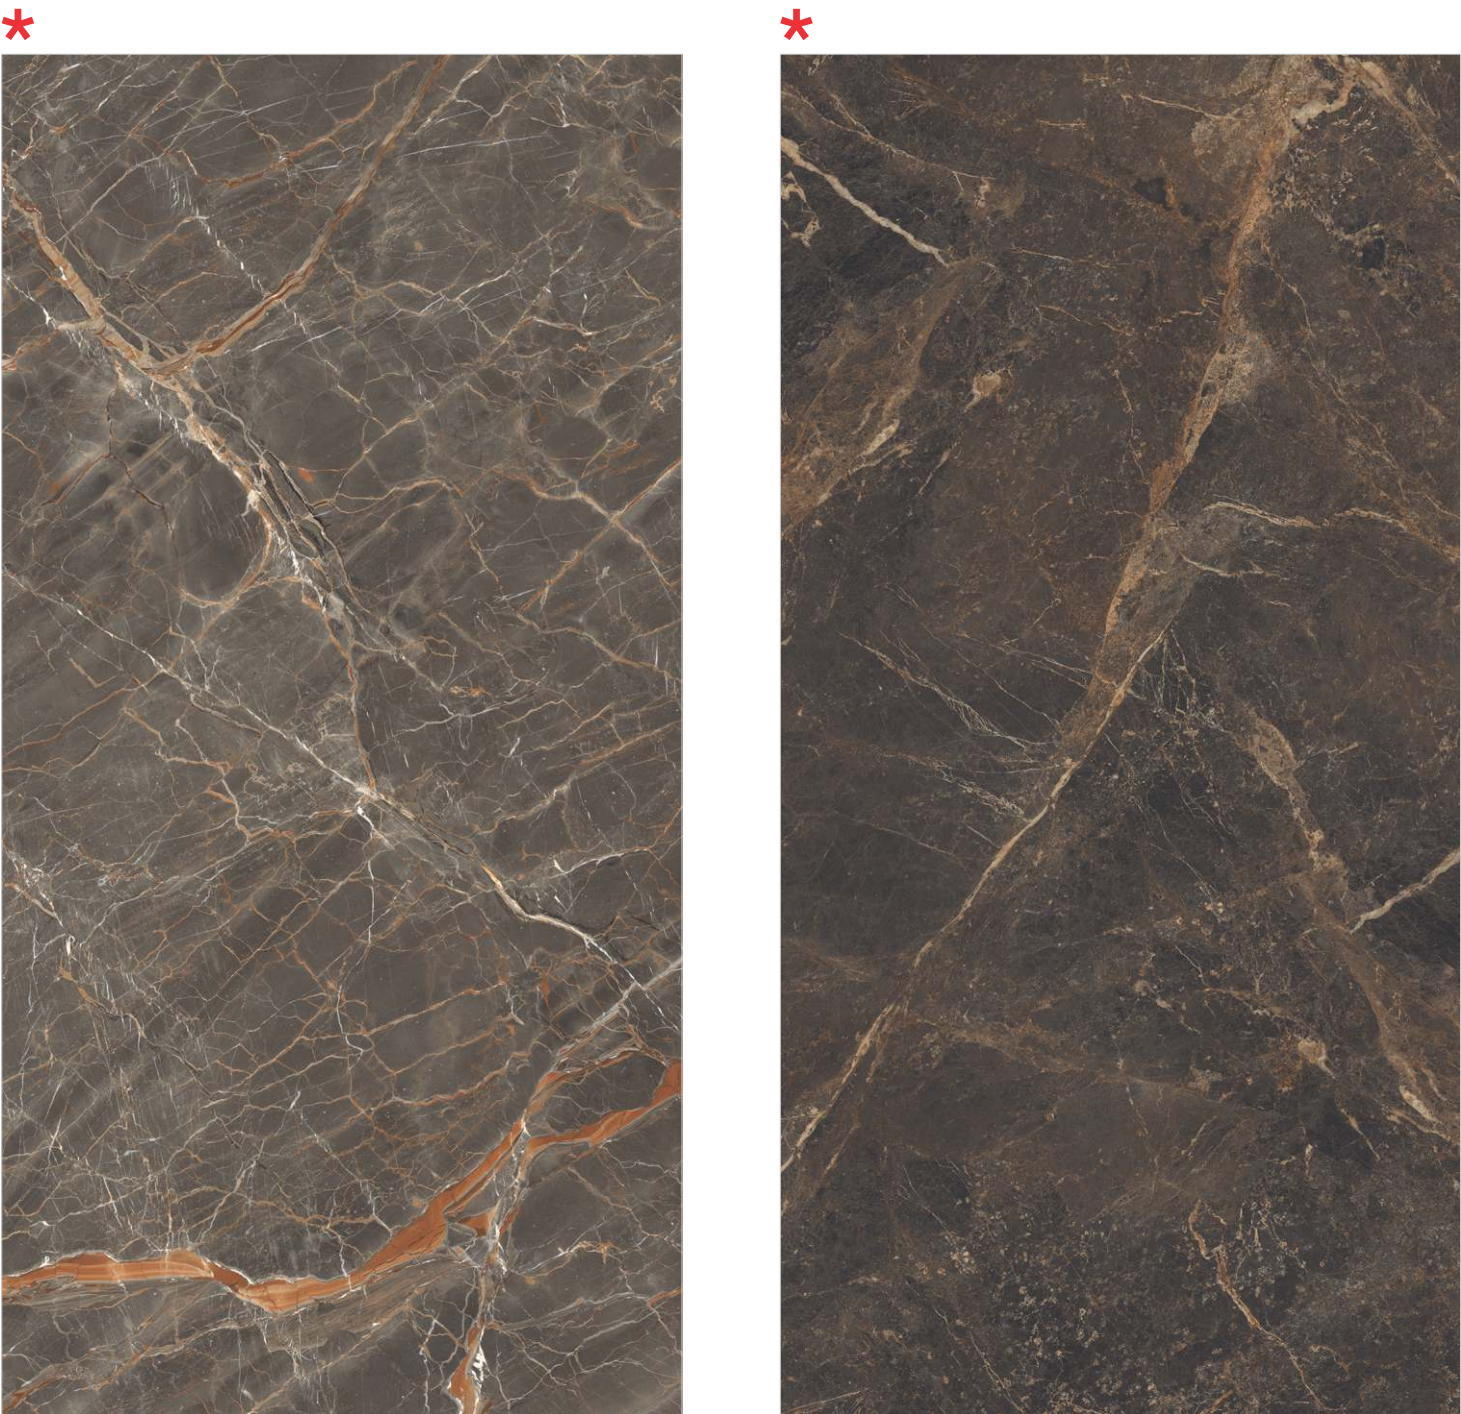

FOREST BROWN 2 RANDOM



EMPERADOR REGAL 3 RANDOM



\*Dark High Glossy Series



1200x  
2400mm

HIGH GLOSSY FINISH

9mm thickness



Versatile  
solutions



Easier  
to lay



Resistant to  
chemical



Resistant  
to loads




Resistant  
to stains



Wide  
range



COVELANO LASA 2 RANDOM



COVELANO LASA (BOOK MATCH) BOOK MATCH A+B



ARENA DUNE 2 RANDOM



ARENA DUNE (BOOK MATCH) BOOK MATCH A+B





1200x  
2400mm

HIGH GLOSSY FINISH


9mm thickness



MARIYAN BROWN (BOOK MATCH) BOOK MATCH A+B



WONDER BEACH 2 RANDOM



Versatile solutions



Easier to lay



Resistant to chemical



Resistant to loads



Resistant to stains



Wide range



TRAVENTINO CREMA 2 RANDOM



TRAVENTINO BEIGE 1 RANDOM







1200x  
2400mm

HIGH GLOSSY FINISH

9mm thickness

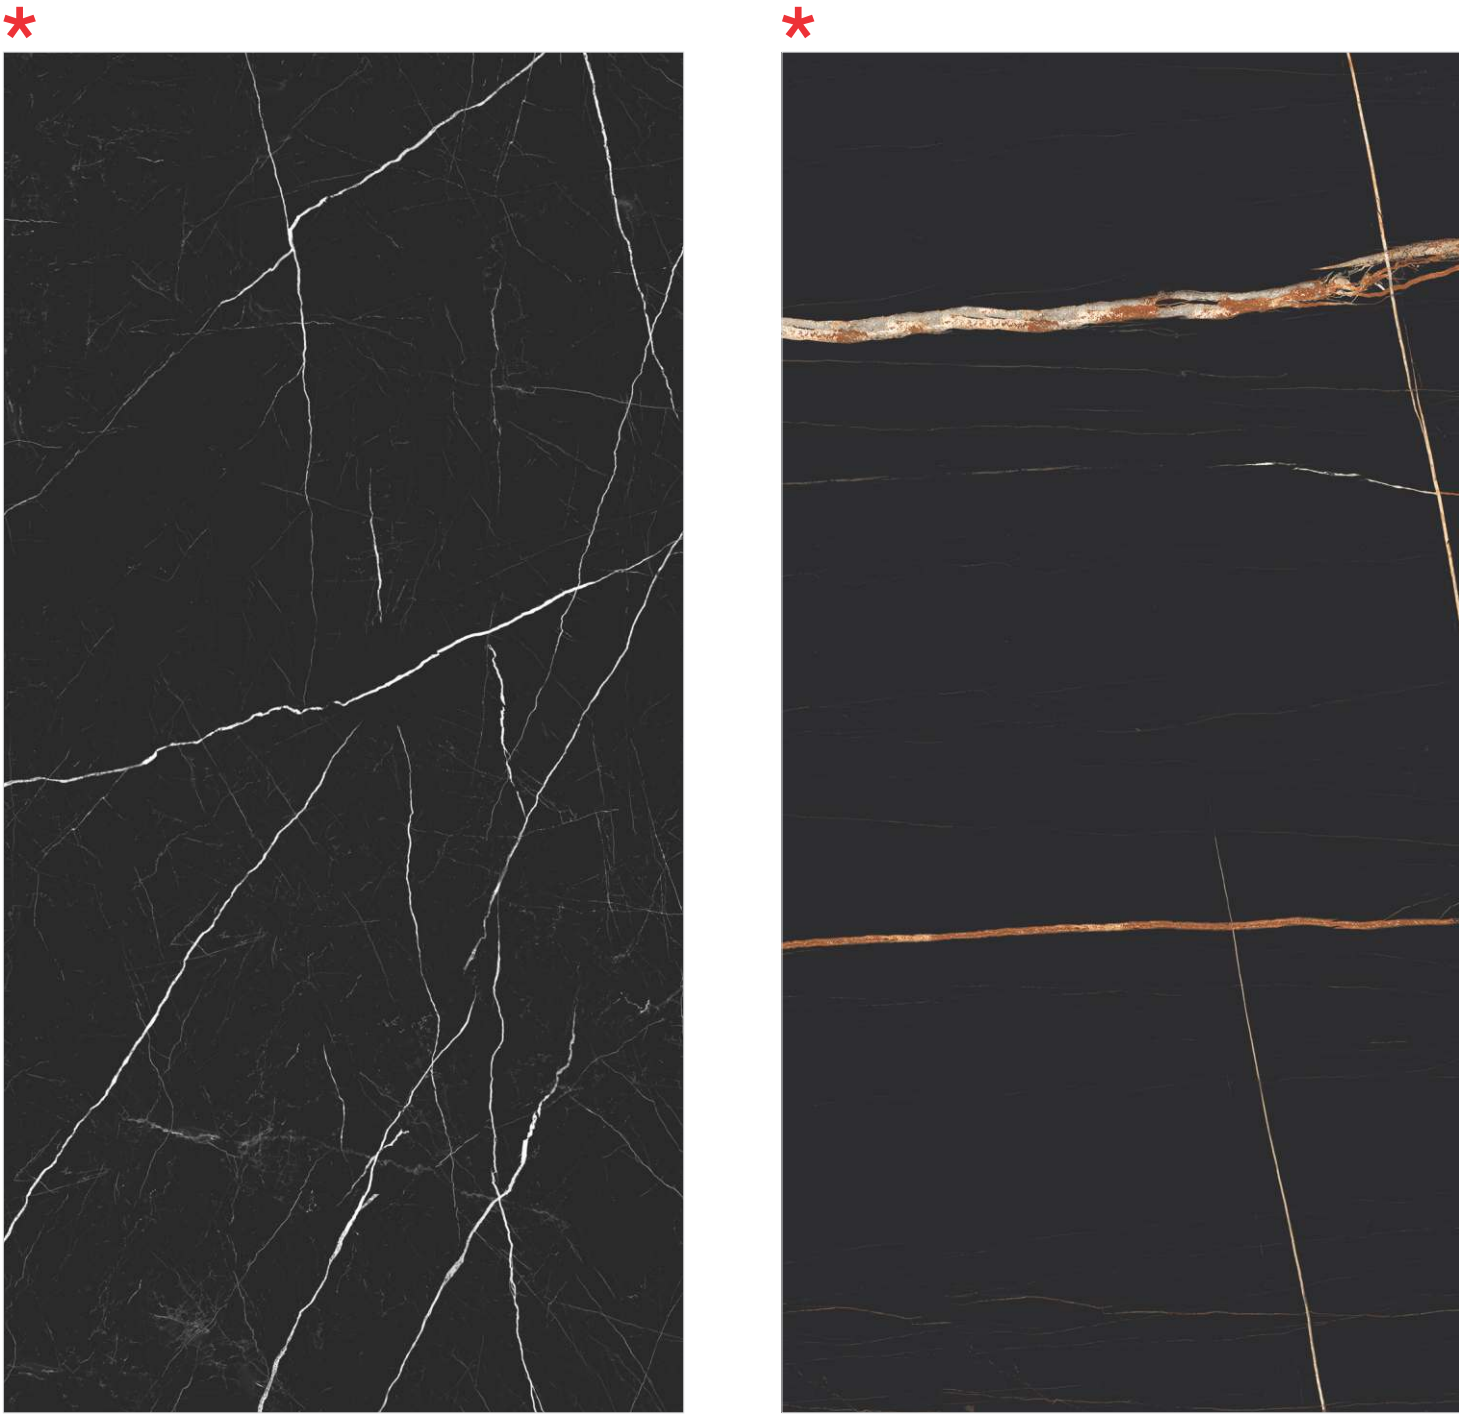

NERO MARQUINA 3 RANDOM

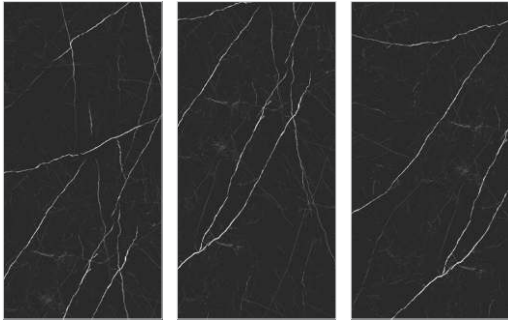


SAHARA BLACK 2 RANDOM




\*Dark High Glossy Series


- Versatile solutions
- Easier to lay
- Resistant to chemical
- Resistant to loads
- Resistant to stains
- Wide range

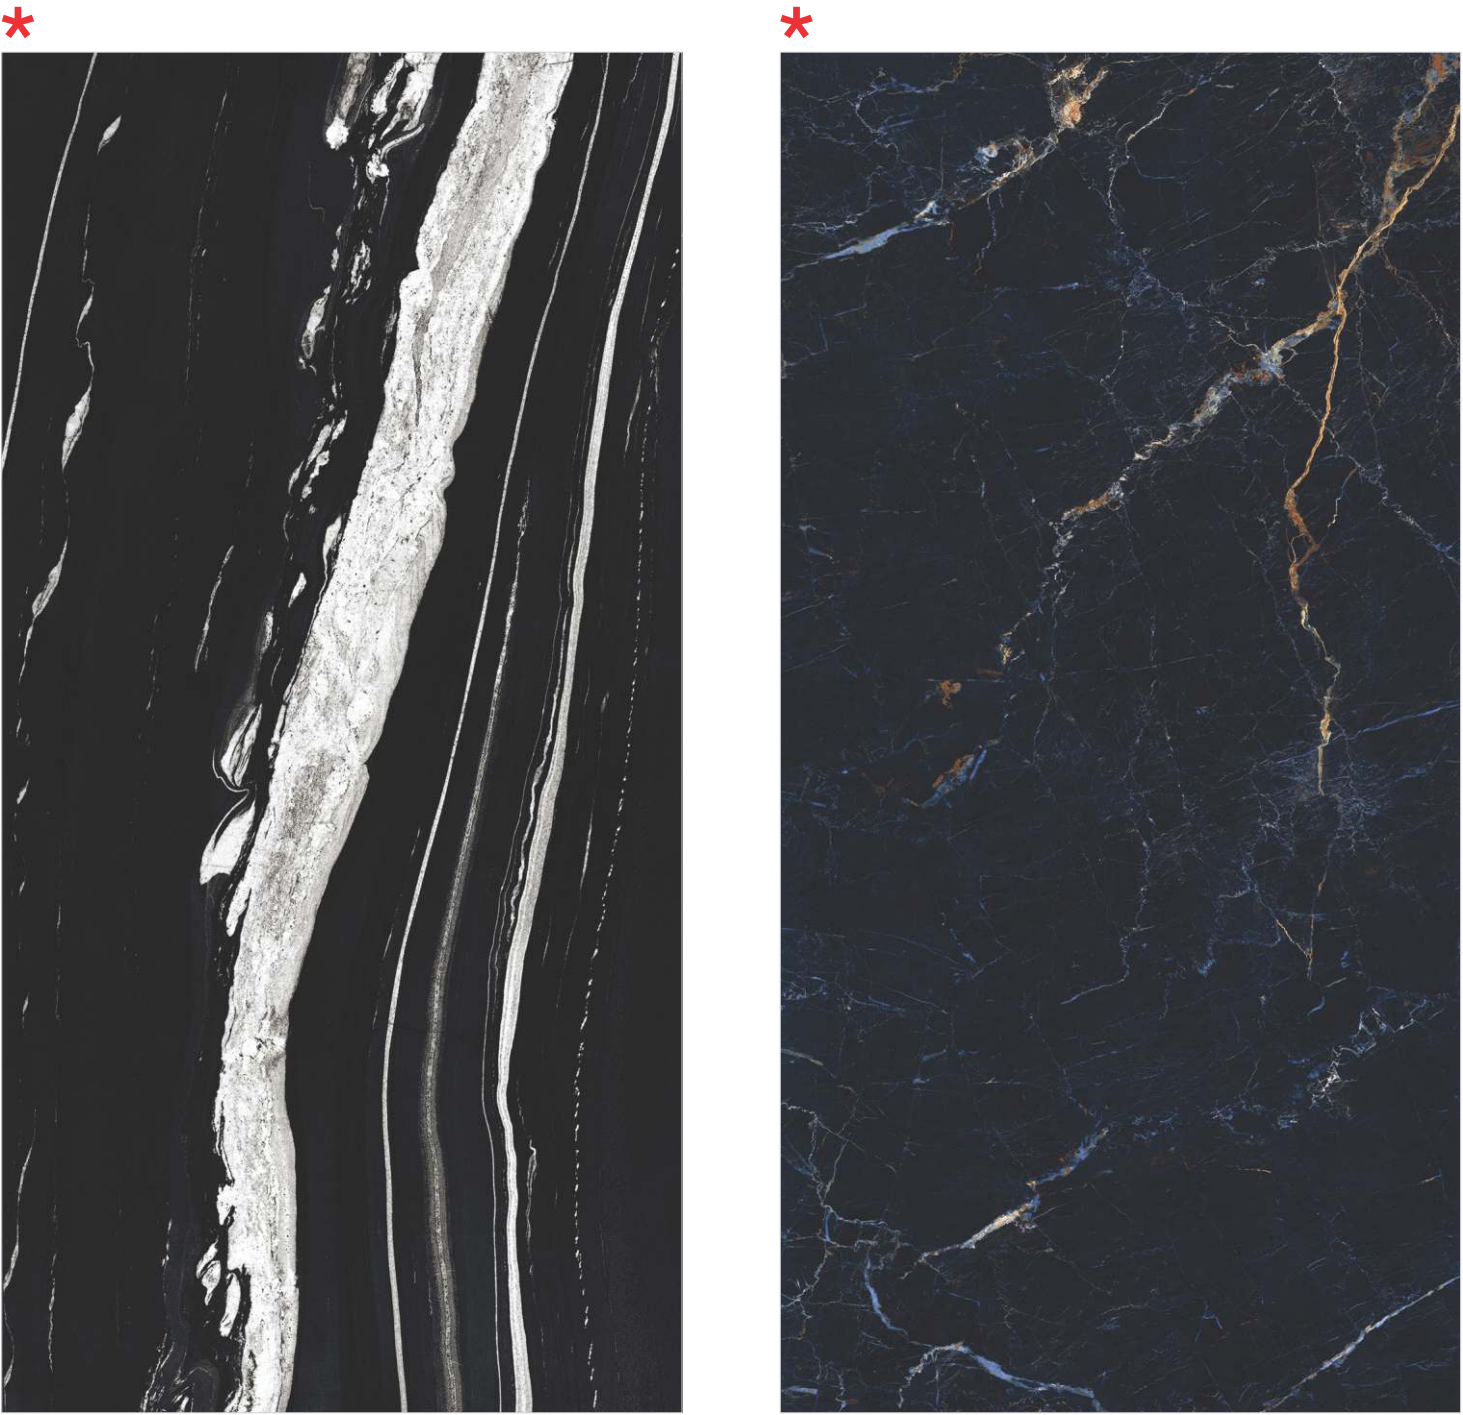

FUSION BLACK (BOOK MATCH) BOOK MATCH A+B



AZUL CIELO 3 RANDOM

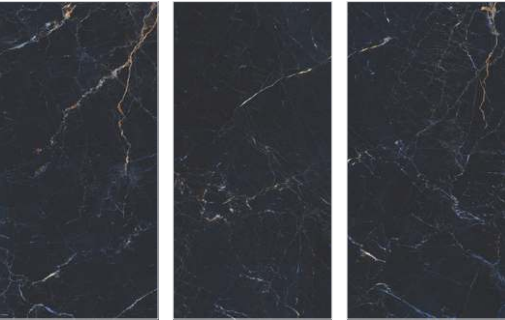

\*Dark High Glossy Series




1200x  
2400mm

HIGH GLOSSY FINISH

9mm thickness

\*

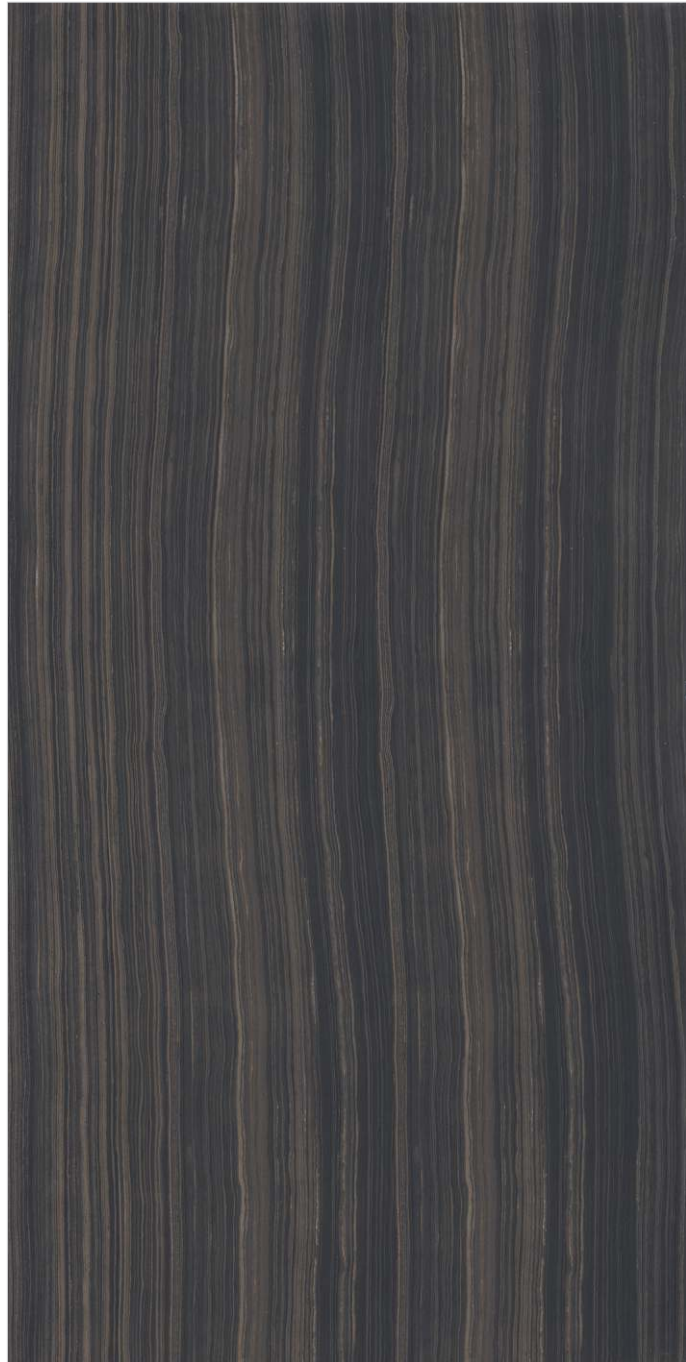


TOBACCO

1 RANDOM



\*

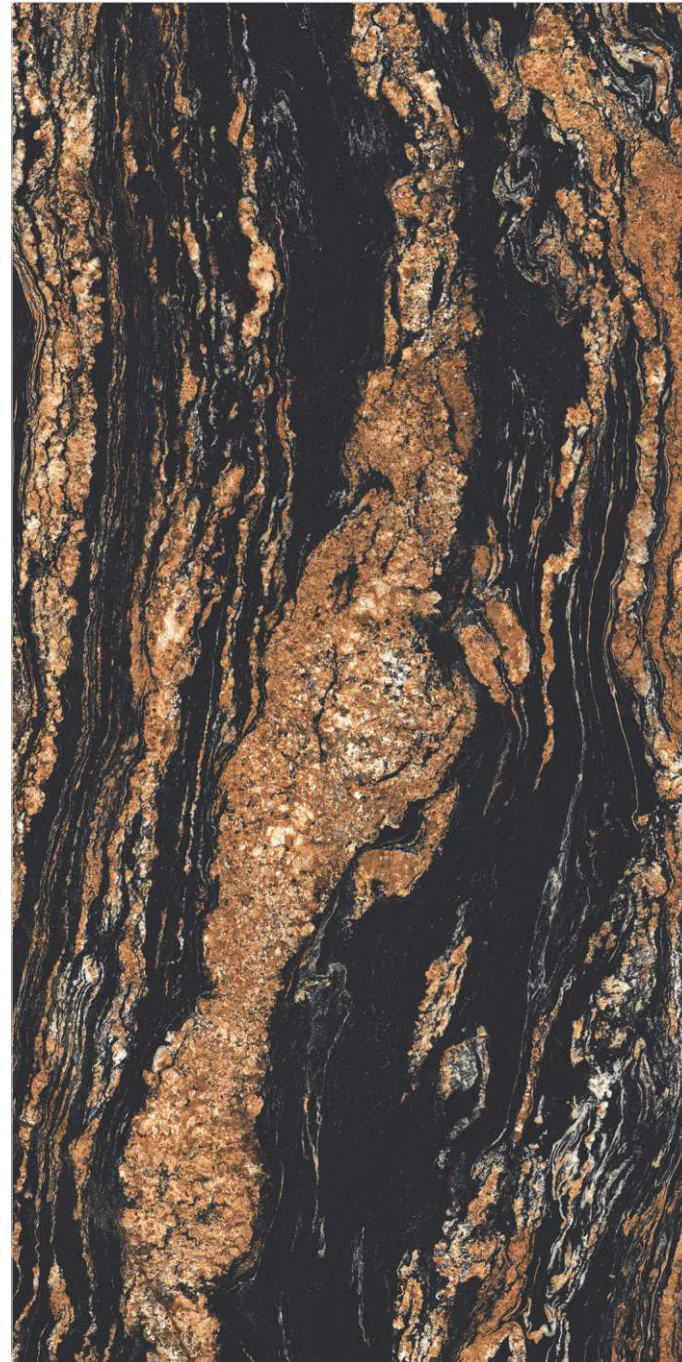

MAGMA BLACK

2 RANDOM



\*Dark High Glossy Series




FLOOR : TOBACCO




1200x  
2400mm

HIGH GLOSSY FINISH

9mm thickness

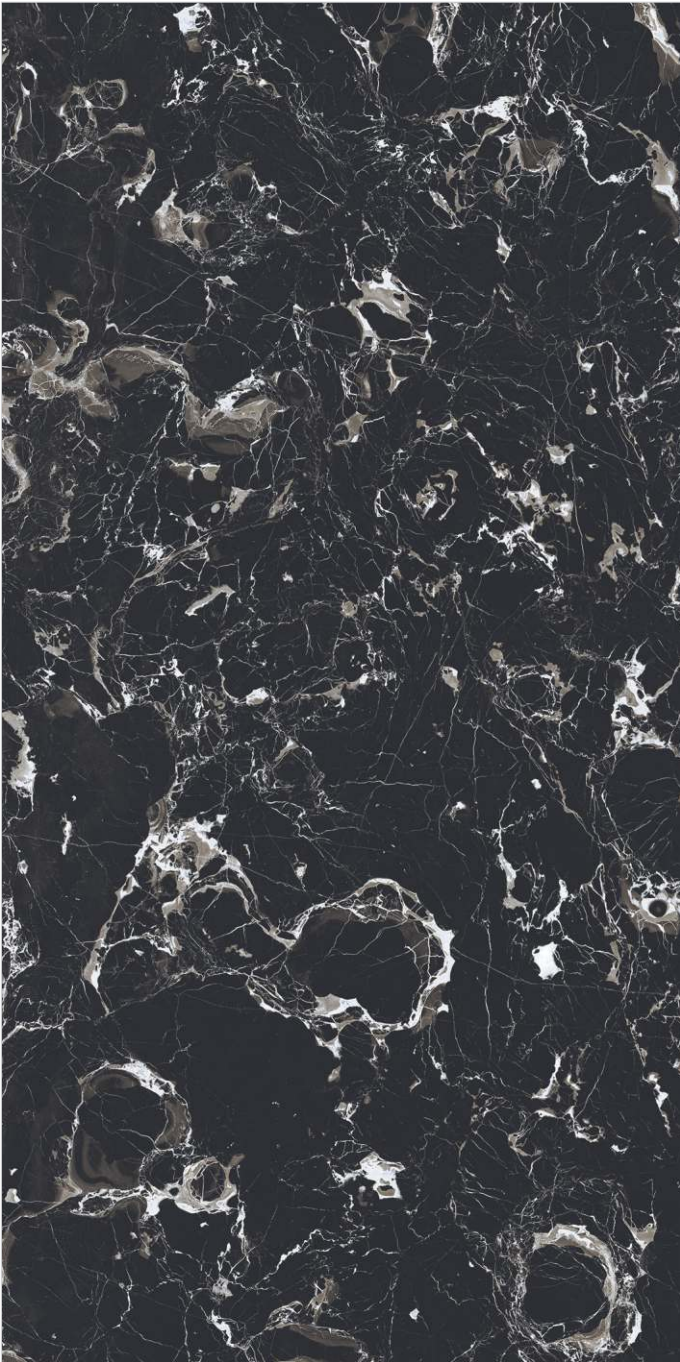

PORTORO SILVER 2 RANDOM

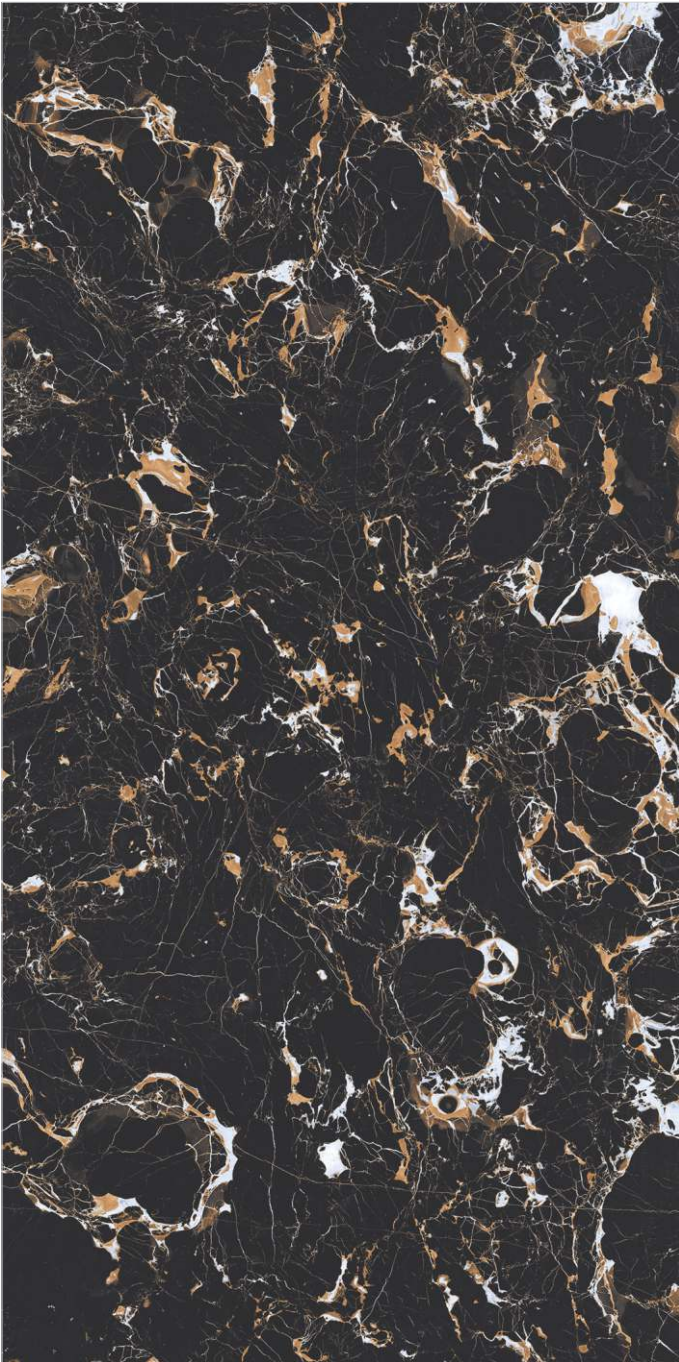

PORTORO GOLD 2 RANDOM



PORTORO 2 RANDOM



Versatile solutions



Easier to lay



Resistant to chemical



Resistant to loads



Resistant to stains



Wide range






WALL : PORTORO SILVER & ANTIQUE SATVARIO | FLOOR : PORTORO SILVER



1200x  
2400mm

MATT FINISH

9mm thickness

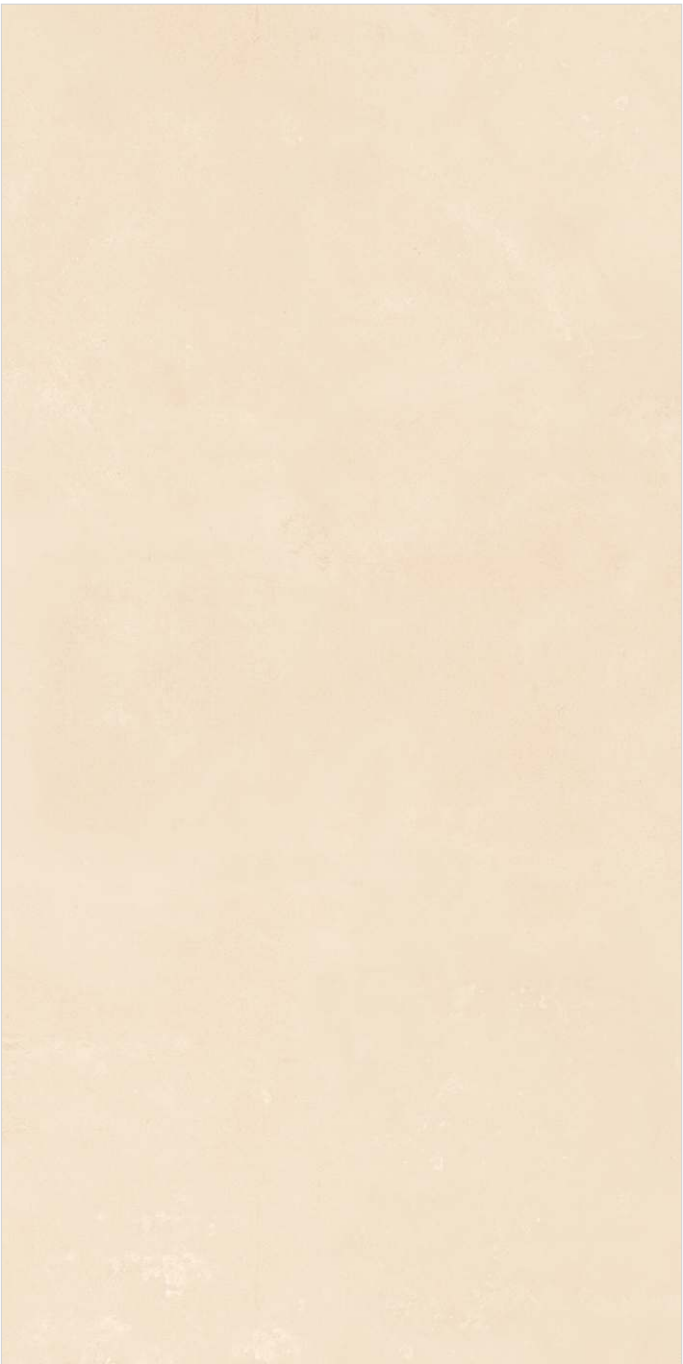

ELEGANT CREMA

1 RANDOM



SANDUNE CAFE

1 RANDOM



FLOOR : SANDUNE CAFE



1200x  
2400mm

MATT FINISH

9mm thickness



Versatile solutions



Easier to lay



Resistant to chemical



Resistant to loads



Resistant to stains




Wide range




WILLIAM BIANCO 2 RANDOM



DUST 4 RANDOM

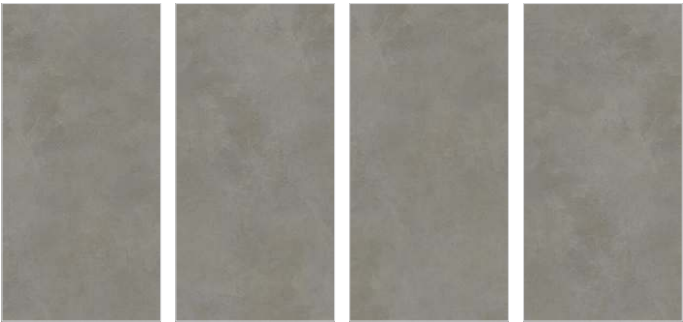

TUNA ROCK ICE 2 RANDOM

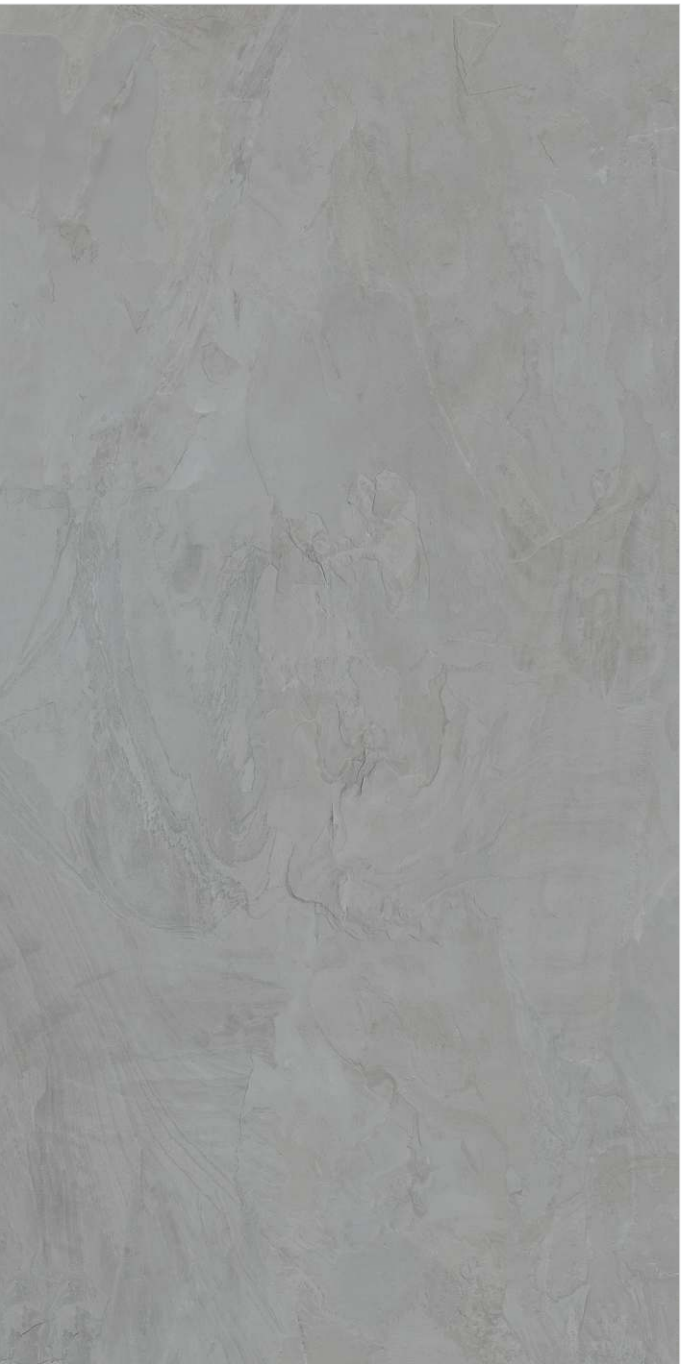

TUNA ROCK GREY 2 RANDOM







1200x  
2400mm

MATT FINISH

9mm thickness



SENTILIA CREMA 1 RANDOM

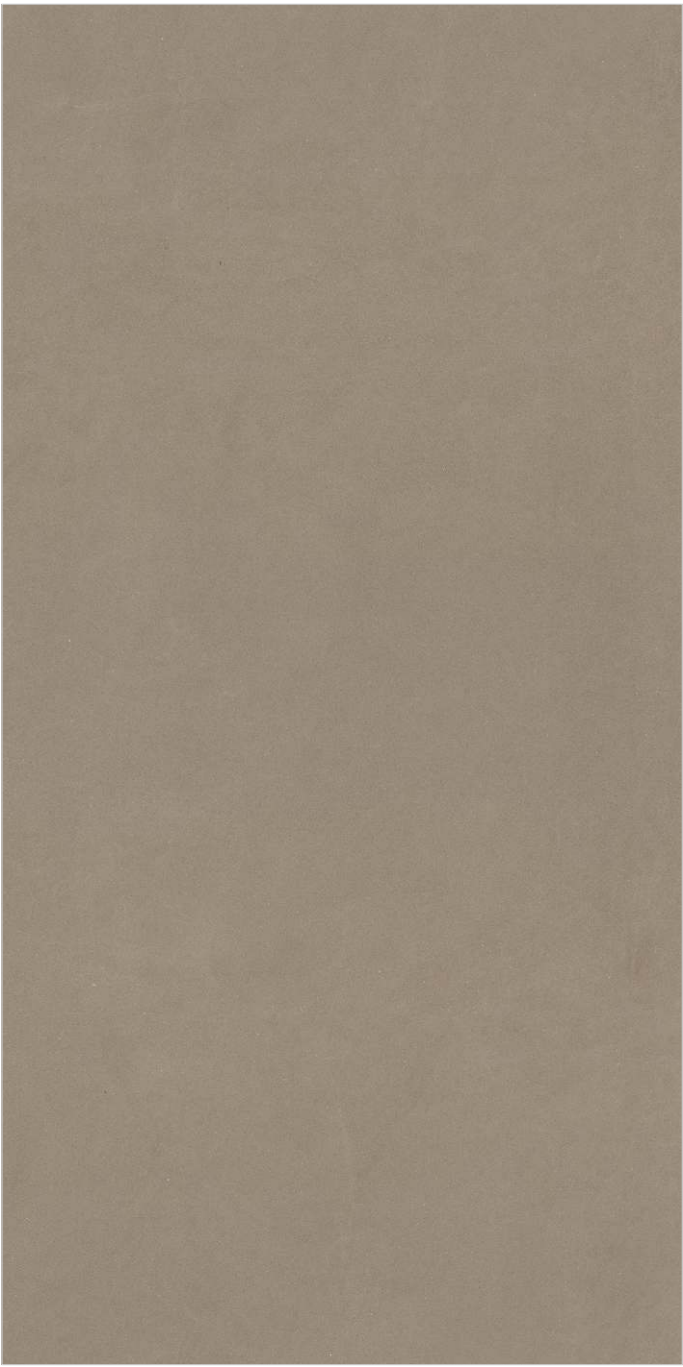

SENTILIA BROWN 1 RANDOM



Versatile  
solutions



Easier  
to lay



Resistant to  
chemical




Resistant  
to loads




Resistant  
to stains



Wide  
range

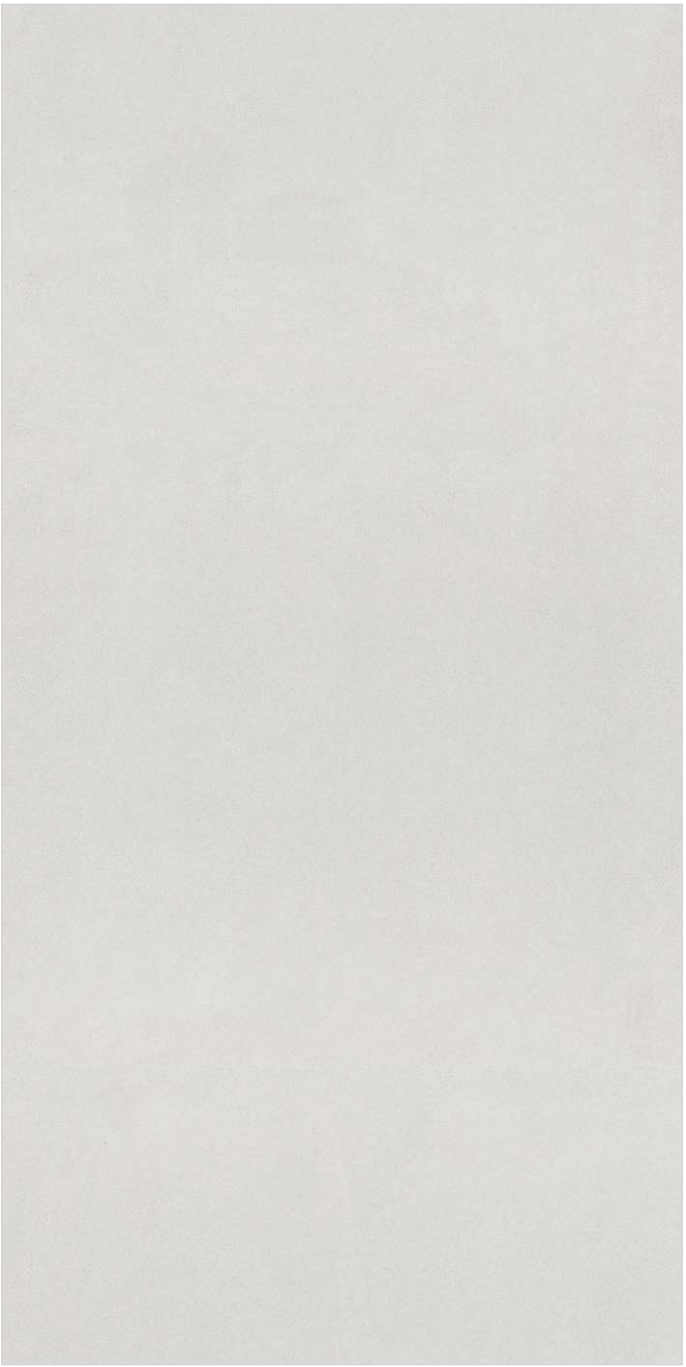

SENTILIA ICE 1 RANDOM

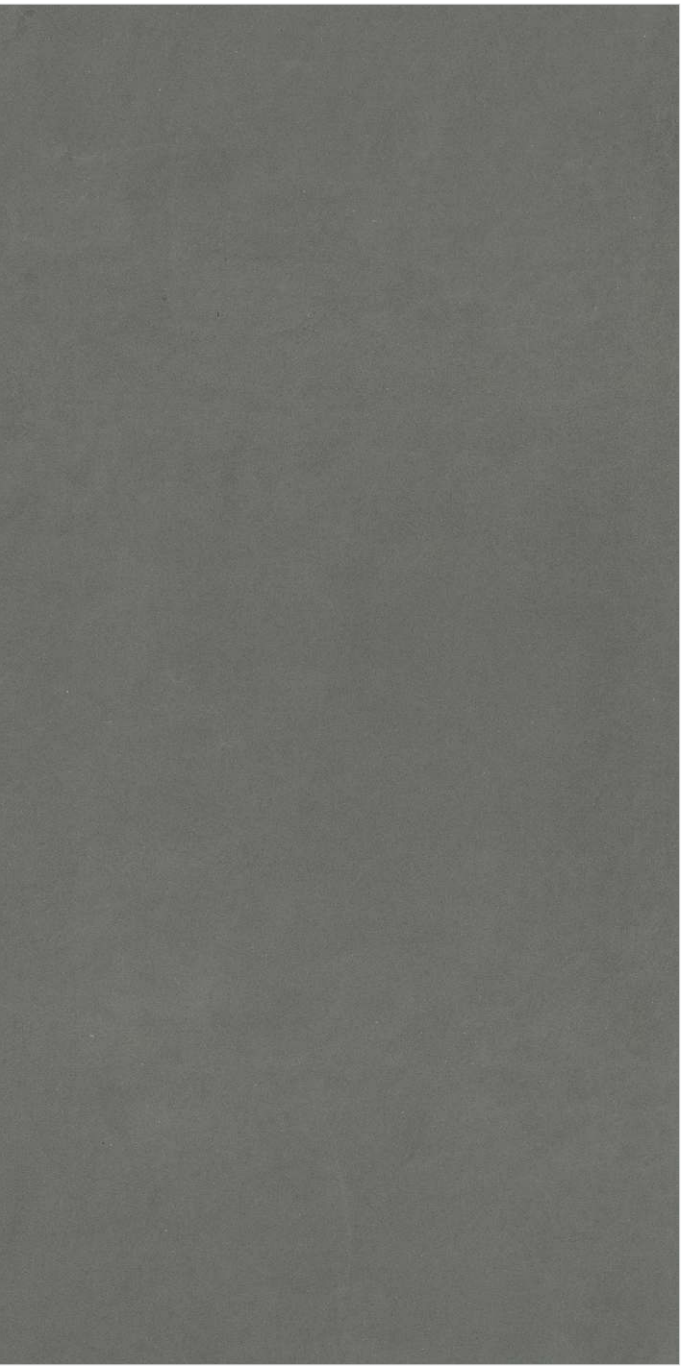

SENTILIA GRIS 1 RANDOM









1200x  
2400mm

CARVING FINISH

9mm thickness



TRAVENTINO CREMA 1 RANDOM



CORTEN BEIGE 2 RANDOM



Versatile solutions



Easier to lay



Resistant to chemical



Resistant to loads



Resistant to stains



Wide range



VERANDA BREEZE 1 RANDOM



RUDE METAL 1 RANDOM







1200x  
2400mm

CARVING FINISH

9mm thickness

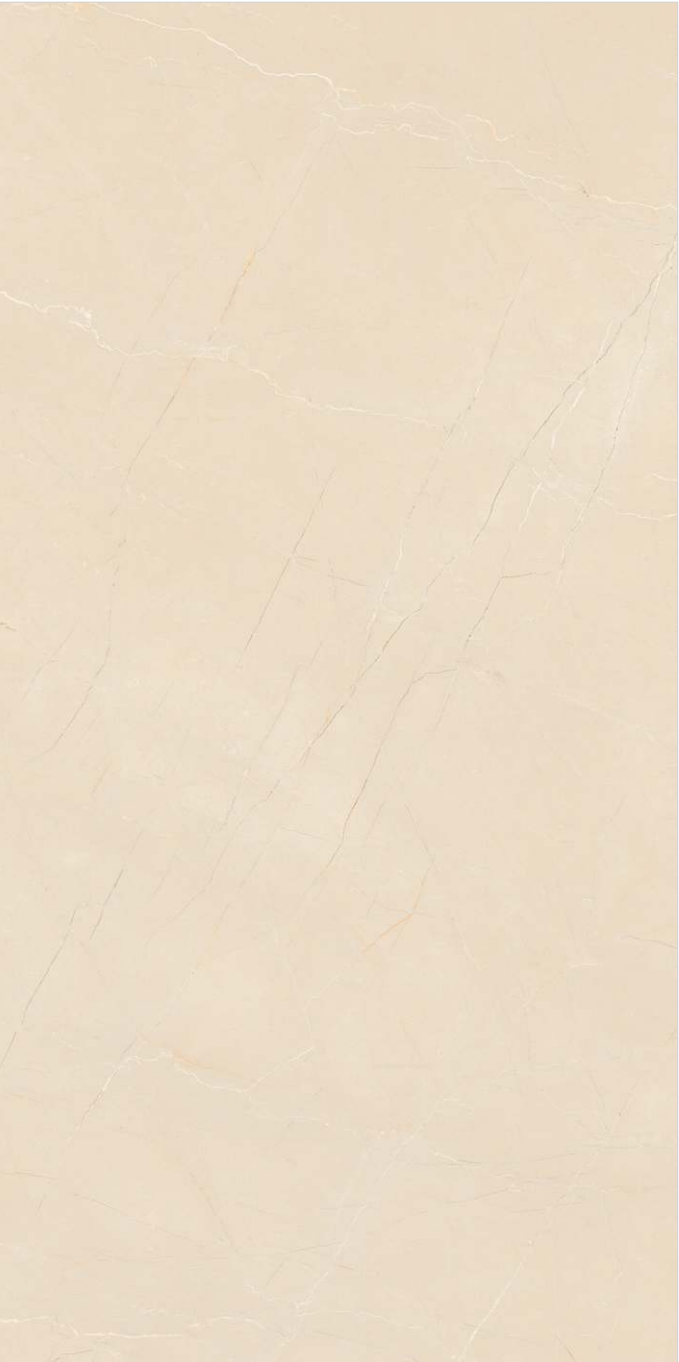

BURBERRY BEIGE 2 RANDOM



BURBERRY BROWN 2 RANDOM



Versatile solutions



Easier to lay



Resistant to chemical



Resistant to loads



Resistant to stains



Wide range



BURBERRY GREY 2 RANDOM






1200x  
2400mm



CARVING FINISH

9mm thickness

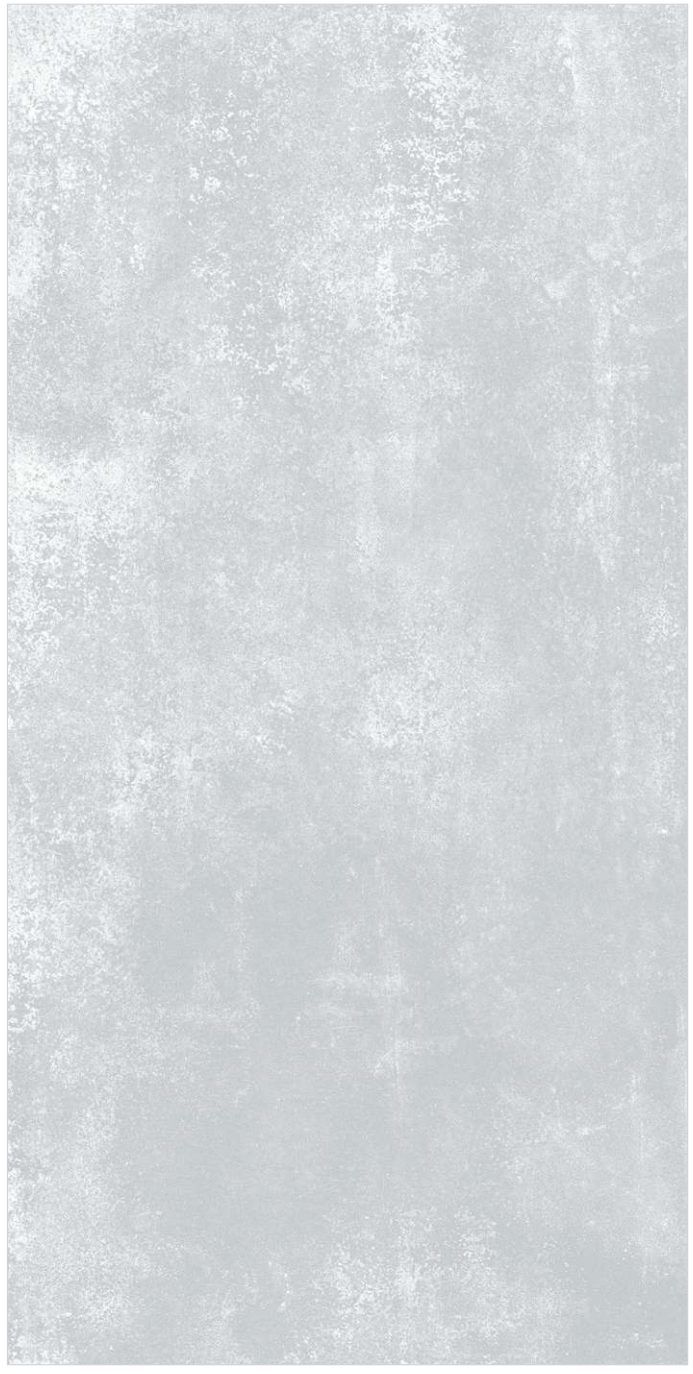

AMMONITE BIANCO 2 RANDOM

AMMONITE NERO 2 RANDOM

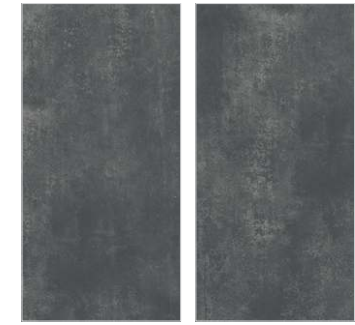

WALL : AMMONITE BIANCO & AMMONITE NERO | FLOOR : AMMONITE NERO



1200x  
2400mm

CARVING FINISH

9mm thickness



STUCCO BEIGE

2 RANDOM



FLOOR : STUCCO BEIGE



1200x  
2400mm

BABY SATIN FINISH

9mm thickness



BRECCIA MARINO LATTE 2 RANDOM



BRECCIA MARINO NATURAL 2 RANDOM



BRECCIA MARINO ASH 2 RANDOM



Versatile solutions



Easier to lay



Resistant to chemical



Resistant to loads



Resistant to stains



Wide range



1200x  
2400mm

BABY SATIN FINISH

9mm thickness



PERSIAN BEIGE 2 RANDOM



FLORENTINE CREMA 2 RANDOM



WALL : PERSIAN BEIGE | FLOOR : SANDUNE CAFE



TECHNICAL SPECIFICATION OF SLAB VITRIFIED TILE

TEST DESCRIPTION			
CHARACTERISTIC	TEST METHOD	STANDARD VALUE	OUR VALUE
Deviation in Length	Is-13630-1	±0.10%	±0.05%
Deviation in Width	Is-13630-1	±0.10%	±0.05%
Deviation in Thickness	Is-13630-1	±5.0%	±3.00%
Straightness of Sides	Is-13630-1	±0.10%	±0.10%
Rectangularity	Is-13630-1	±0.10%	±0.10%
Surface Flatness	Is-13630-1	±0.50%	±0.2%
Surface Quality	Is-13630-1	Min. 95%	Min. 95%
PHYSICAL PROPERTIES			
CHARACTERISTIC	TEST METHOD	STANDARD VALUE	OUR VALUE
Water Absorption	Is-13630-2	≥0.08% Avg.	0.04% Avg.(±0.02%)
Modulus of Rapture(N/mm2)	Is-13630-6	Avg. 35N/mm2	Avg. 42N/mm2
Breaking Strength(N)	Is-13630-6	<7.5mm-700n ≥7.5mm-1300n	<6mm-1200n ≥6mm-1350n
Moisture Expansion(mm/m)	Is-13630-3	0.02 Max	0.01 Max
Scratch Hardness of Surface	Is-13630-13	8 Min	4-4.5
Resistance of Surface Abrasion(Glazed Tiles)	Is-13630-11	Class <b>II</b> Min.	Class <b>II</b> Min.
Co-Efficent of Linear Thermal Expansion	Is-13630-4	6x10-6 Max	6.5x10-6 Max.
Thermal Shock Resistance	Is-13630-5	10 Cycles Min.	10 Cycles, Pass
Crazing Resistance	Is-13630-9	4 Cycles at 7.5 Bar Min.	5 Cycles at 7.5kg Pressure
Impact Resistance-Coefficent of Restitution	Is-13630-14	0.55 Min.	0.55 Min
Frost Resistance	Is-13630-10	According to Manufacturing Process	No Damage
Bulk Density (g/cc)	Is-13630-2	2.2 Min.	2.3
Penalty (Curvature)	-	±1.0%	±0.6%
CHEMICAL PROPERTIES			
CHARACTERISTIC	TEST METHOD	STANDARD VALUE	OUR VALUE
Resistance of Staining	Is-13630-8	Class <b>I</b> Min.	Class <b>II</b>
Resistance of Household Chemicals	Is-13630-8	Class <b>AA</b> Min.	Class <b>AA</b>
Resistance to Acids & Alkalıs	Is-13630-8	According to Manufacturing Process	Resistance
Slip Resistance	150-13006/EN1444 Group BIA	As pr Mfg.	>0.40

PACKING DETAIL


No.	Size	Thickness (approx.)	Pieces/Box	Area/Box	Wt./Box(approx.)
01	1200x2400mm	9.0mm	1 pcs.	2.88 sq. mtr.	60 Kgs.

SLAB LAYING INSTRUCTIONS

- Plaster the surface of the floor to be tiled smooth and complete the plastering and curing at least two hour prior to tilling.
- Before fixing SLAB, lay them out in desired pattern and make sure that give acceptable blend of colour. Please not that certain amount of shade variation is inherent in the manufacture of a fully vitrified ceramic tile.  
THE COMPANY WALL BEAR NO LIABILITY AFTER THE TILES ARE FIXED.
- For fixing SLAB, we recommend the use of the tile fixing adhesive for best result. Also follow the tile fixing instructions provided along with adhesives.
- For fixing SLAB on the floor using sand and cement follow the instructions given bellow:  
- Use cement and sand mortar in the ratio of 1:4 add some water to create a consistent paste.  
- Once the mixing has been completed do not add any further water to create a consistent paste.  
- Apply a 20-30mm layer of bedding material over an area of 1 square meter at a time on the surface of the area. Apply a fine slurry to the back of the tile to ensure proper and dull bedding. press gently for even adherence at the back of the tile.  
DO NOT USE IRON HAMMER OR SOME HEAVY MATERIAL TO PRESS THE TILES.
- For fixing SLAB on dado, we recommend the use of adhesive. Please follow the manufacture’s instructions for the same. We do not recommend the use of sand and cement for fixing on dado.
- Mark and layout the tiles from the center of the area to be tile so that cut tiles. If any will be on the outer edges to words the walls.
- The work size which we try to maintain for better technical performance is 1200x2400mm, 800x2400mm,900x1800mm, 800x1600mm, & 1200x1200mm on average. it is advisable to maintain a gap of 1mm to 3mm between every two tile to allow for possible expansion as per BIS/EN tolerance norms. This would give the coverage area as mentioned in the cartoon.
- Complete the tile laying process by pressing the center of the SLAB firmly into place along the walls/floors.
- Allow 3-4 days for bed curing. After this period fill the joints with grouts.
- Fifteen minutes after finishing the grouting process, wipe off excess grout with a damp sponge and polish the tile with a soft and dry cloth for a clean surface. The tile can also be cleaned by mild acid(however hydrofluoric acid and its derivatives should not be used)
- Please note that the company does not accept any liability in case of problems arising out of non-adherence to these fixing instructions.

TILING POSSIBILITIES

800X1600MM

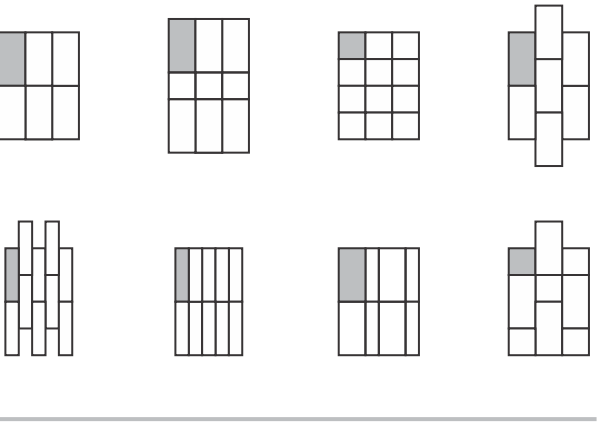

1200X1200MM

